

LDC8-180-GC8

FEATURES&BENEFITS

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life & High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
8	200	182	170	153	135	365	155	/


PHYSICAL SPECIFICATIONS

Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
260/10.24	180/7.09	252/9.92	274/10.79	30.8/67.9	MT	PP

Operating Temperature Range		
Discharge	Charge	Storage
-15°C~50°C(5°F~122°F)	0°C~40°C(32°F~104°F)	-15°C~40°C(5°F~104°F)

LDC8-180-GC8


DIMENSIONS

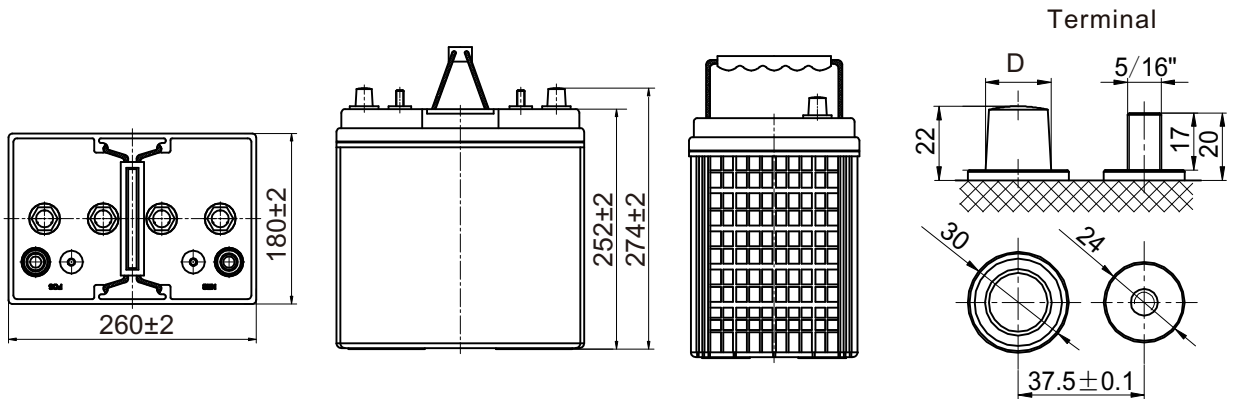


Note: D: Positive $19.5^{0}_{-0.3}$; D: Negative $17.9^{0}_{-0.3}$; Terminal Torque Values in-lb(Nm): 176-203(20-23)

PERFORMANCE CHARACTERISTICS


Charging Profile

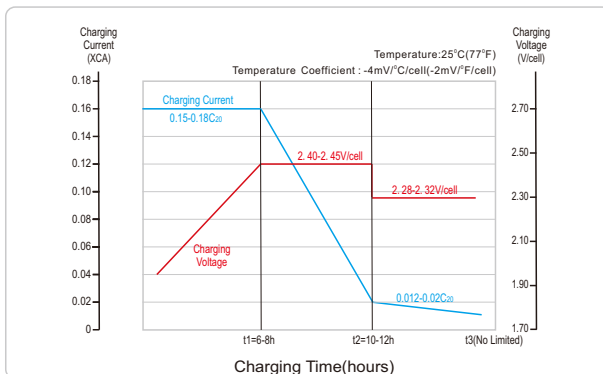

Relationship of OCV and State Of Charge (25°C , 77°F)

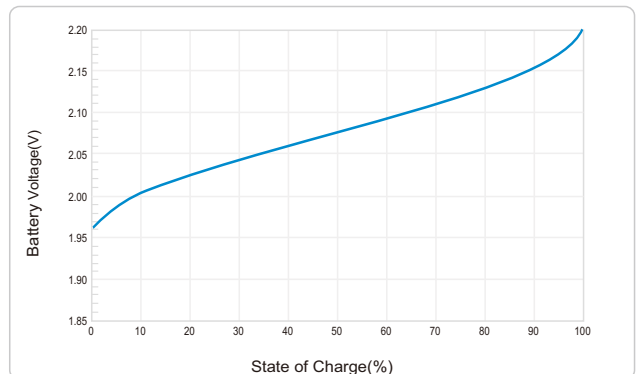

Cycle life in relation to Depth Of Discharge

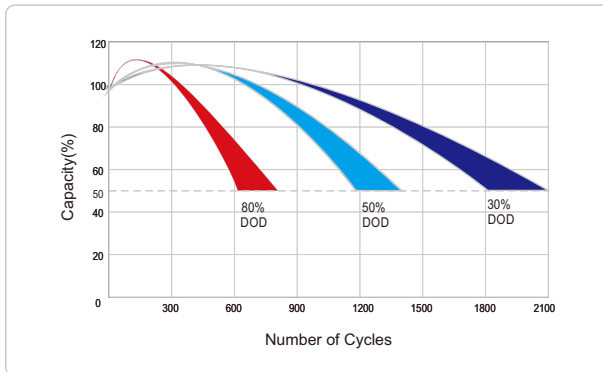

Self-discharge Characteristic

