



DEEP CYCLE AGM TECHNOLOGY

LDC12-245

FEATURES&BENEFITS

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life & High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
12	270	245	233	210	185	535	/	145

PHYSICAL SPECIFICATIONS

Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
387/15.24	1.80/7.09	346/13.62	368/14.49	64.3/141.8	MT	PP

Operating Temperature Range		
Discharge	Charge	Storage
-15°C~50°C(5°F~122°F)	0°C~40°C(32°F-104°F)	-15°C~40°C(5°F~104°F)



ETL SEMKO



IATF16949


ISO14001

ISO9001

ISO18001

LDC12-245


DIMENSIONS

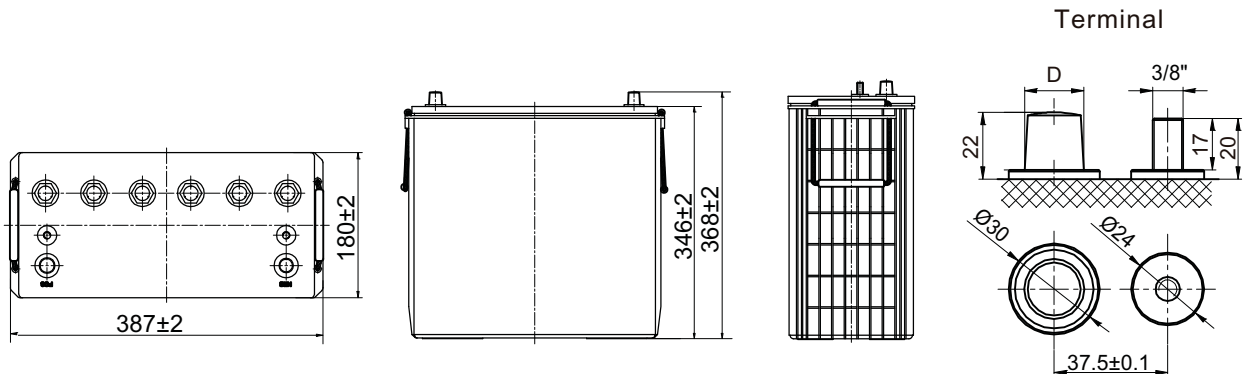


Note: D: Positive $19.5^{0}_{-0.3}$, D: Negative $17.9^{0}_{-0.3}$; Terminal Torque Values in lb(Nm): 176-203(20-23)

PERFORMANCE CHARACTERISTICS


Charging Profile

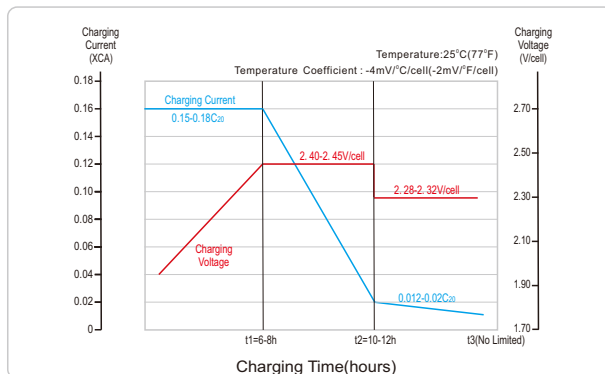

Relationship of OCV and State Of Charge (25°C , 77°F)

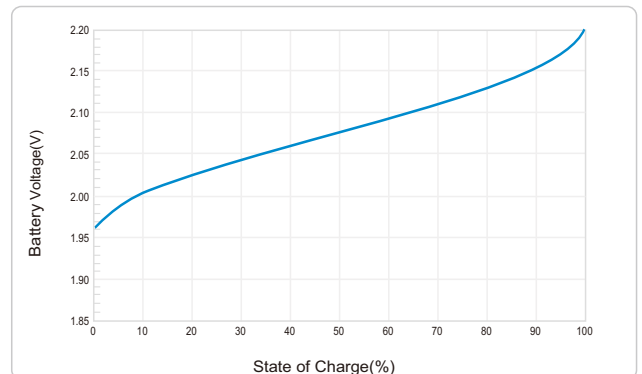

Cycle life in relation to Depth Of Discharge

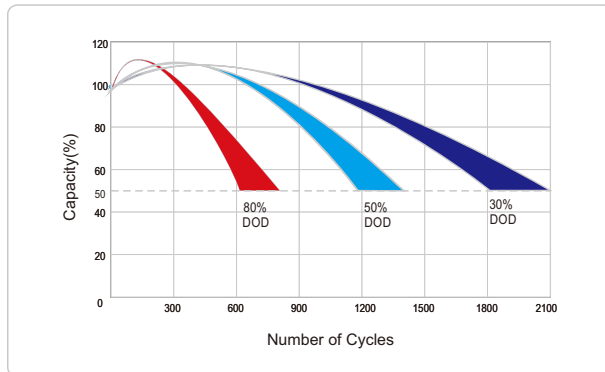

Self-discharge Characteristic

