

Specification


Code:460-6015

Nominal Voltage	6V	
Nominal Capacity(20HR)	3.2AH	
Dimensions	Length	134 ± 2mm (5.28 inches)
	Width	34 ± 1mm (1.34 inches)
	Container Height	60 ± 1mm (2.36 inches)
	Total Height (with Terminal)	66 ± 1mm (2.60 inches)
Approx Weight	Approx 0.67 kg (1.48lbs)	
Terminal	T1	
Container Material	ABS	
Rated Capacity	3.20 AH/0.16A	(20hr , 1.80V/cell,25°C/77°F)
	2.98 AH/0.298A	(10hr, 1.80V/cell,25°C/77°F)
	2.69 AH/0.538A	(5hr, 1.75V/cell,25°C/77°F)
	2.35 AH/0.783A	(3hr, 1.75V/cell,25°C/77°F)
	1.97 AH/1.97A	(1hr, 1.60V/cell,25°C/77°F)
Max. Discharge Current	48A (5s)	
Internal Resistance	Approx 28mΩ	
Operating Temp.Range	Discharge : -15 ~ 50°C (5 ~ 122°F)	
	Charge : 0 ~ 40°C (32 ~ 104°F)	
	Storage : -15 ~ 40°C (5 ~ 104°F)	
Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)	
Cycle Use	Initial Charging Current less than 0.96A.Voltage 7.2V~7.5V at 25° C(77° F)Temp. Coefficient -15mV/°C	
Standby Use	No limit on Initial Charging Current Voltage 6.75V~6.9V at 25° C(77° F)Temp. Coefficient -10mV/°C	
Capacity affected by Temperature	40° C (104° F)	103%
	25° C (77° F)	100%
	0° C (32° F)	86%
Self Discharge	CT series batteries may be stored for up to 6 months at 25° C(77° F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Applications

- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system

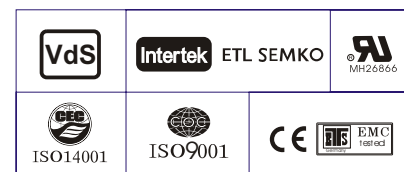

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	5.94	4.29	3.58	3.06	2.46	1.89	1.55	0.944	0.719	0.591	0.502	0.435	0.345	0.287	0.158
1.80V/cell	7.55	5.11	4.10	3.47	2.72	2.06	1.66	1.00	0.756	0.622	0.524	0.454	0.358	0.298	0.160
1.75V/cell	8.95	5.78	4.52	3.77	2.91	2.19	1.75	1.05	0.783	0.641	0.538	0.465	0.368	0.303	0.162
1.70V/cell	10.2	6.45	4.97	4.08	3.09	2.30	1.84	1.09	0.809	0.657	0.551	0.476	0.374	0.308	0.164
1.65V/cell	11.2	6.97	5.31	4.36	3.26	2.40	1.90	1.12	0.829	0.670	0.563	0.485	0.380	0.313	0.167
1.60V/cell	12.1	7.51	5.70	4.65	3.42	2.50	1.97	1.16	0.849	0.687	0.575	0.495	0.388	0.318	0.168


Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	11.3	8.21	6.93	5.97	4.82	3.73	3.06	1.88	1.44	1.19	1.01	0.876	0.698	0.582	0.322
1.80V/cell	14.2	9.72	7.87	6.71	5.31	4.05	3.28	1.99	1.51	1.24	1.05	0.911	0.722	0.601	0.324
1.75V/cell	16.7	10.9	8.62	7.27	5.65	4.28	3.45	2.07	1.55	1.28	1.07	0.931	0.739	0.610	0.325
1.70V/cell	18.7	12.1	9.43	7.82	5.98	4.49	3.61	2.15	1.60	1.30	1.10	0.950	0.747	0.618	0.330
1.65V/cell	20.4	12.9	9.98	8.30	6.27	4.66	3.72	2.20	1.64	1.33	1.12	0.966	0.758	0.625	0.334
1.60V/cell	21.8	13.8	10.6	8.77	6.54	4.82	3.84	2.26	1.67	1.36	1.14	0.983	0.772	0.634	0.335


Dimensions

T1 Terminal


Unit: mm [inches]

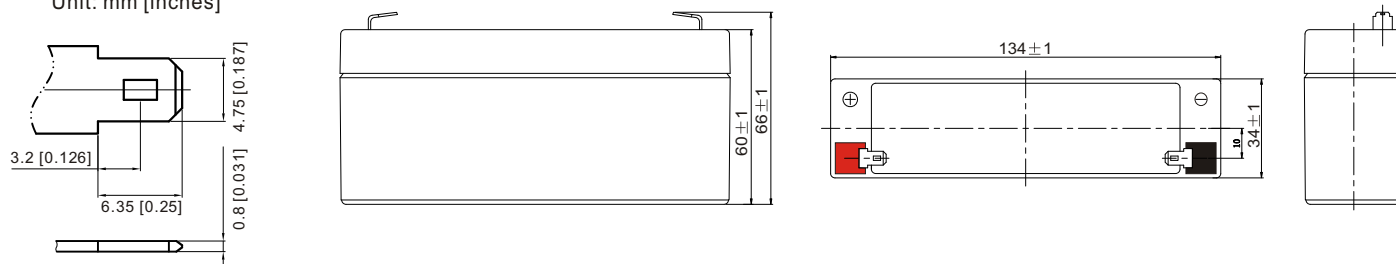


Discharge Characteristics

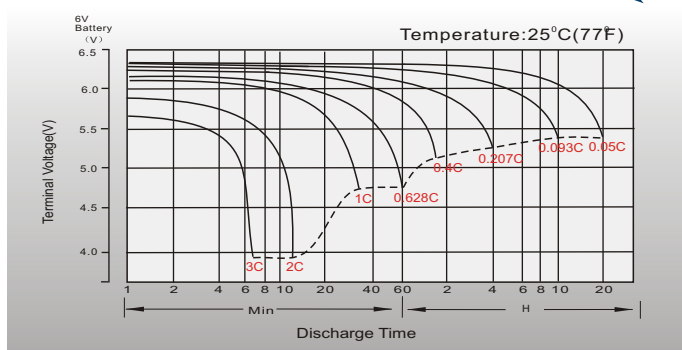


Float Charging Characteristics

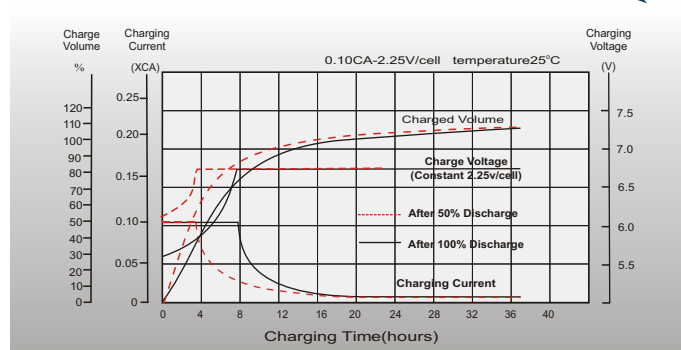


Temperature Effects in Relation to Battery Capacity

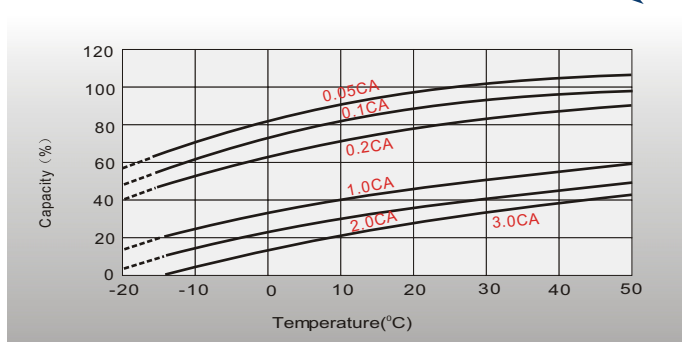


Effect of Temperature on Long Term Float Life

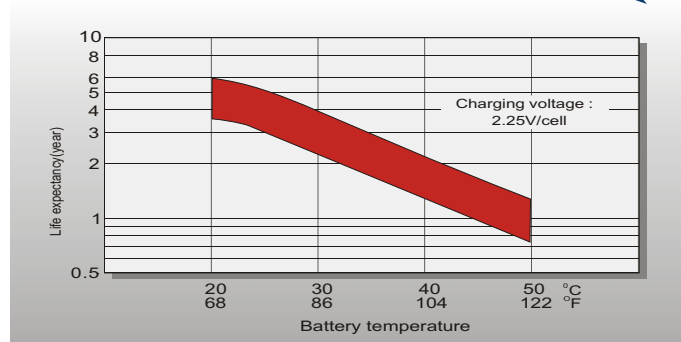

Cycle Life in Relation to Depth of Discharge

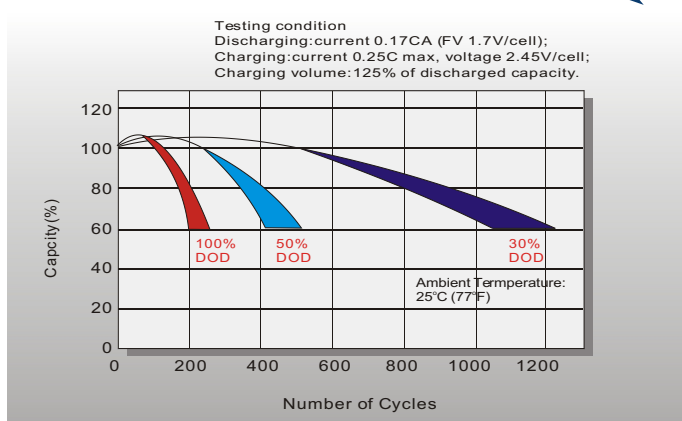

Self Discharge Characteristics

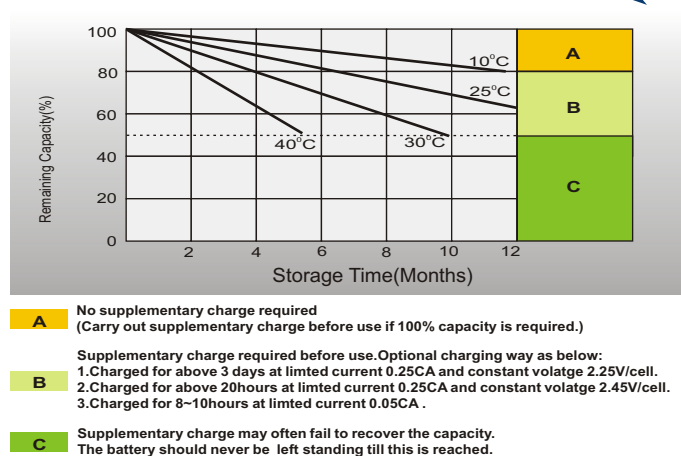

Sales Office

Finland and Baltic countries

Celltech Oy
 Höyläamötie 11 A, 00380 Helsinki, Finland
 TEL: +358 (0) 207 999 640
 E-mail: info@celltech.fi
 www.celltech.fi

Denmark

Celltech A/S
 Lejrvej 25, 3500 Værløse, Denmark
 TEL: +45 7025 2201
 E-mail: info@celltech.dk
 www.celltech.dk

Norway

Staubo Elektro-Maskin AS
 Bjoernerudveien 12 C, 1266 Oslo, Norway
 TEL: +47 22 75 35 00
 E-Mail: post@staubo.no
 www.staubo.no