


Specification		Code:460-6215
Nominal Voltage	12V	
Nominal Capacity(10HR)	94.4 AH	
Dimension	Length	394±3mm (15.5 inches)
	Width	110±2mm (4.33 inches)
	Container Height	285±3mm (11.2 inches)
	Total Height (with Terminal)	285±3mm (11.2 inches)
Approx Weight	Approx 32.6 Kg (71.9 lbs)	
Terminal	T6	
Container Material	ABS	
Rated Capacity	100.0 AH/5.00A	(20hr, 1.80V/cell, 25°C/77°F)
	94.4 AH/9.44A	(10hr, 1.80V/cell, 25°C/77°F)
	90.0 AH/11.25A	(8hr, 1.80V/cell, 25°C/77°F)
	82.0 AH/16.4A	(5hr, 1.75V/cell, 25°C/77°F)
	62.3 AH/62.3A	(1hr, 1.67V/cell, 25°C/77°F)
Max. Discharge Current	900A (5s)	
Internal Resistance	Approx 4.5mΩ	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 28.5A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Standby Use		
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	CT series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Applications

- ◆ For standard 19 inches or 23 inches power cabinets
- ◆ Network connection equipment of communication system
- ◆ Power system of special network or local area network
- ◆ UPS, standby power supply
- ◆ Power station systems
- ◆ Railway and marine systems

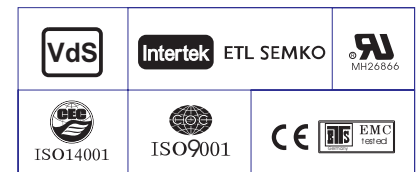

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	136.5	119.2	106.1	85.7	66.8	54.1	31.5	22.9	18.3	15.4	13.4	10.82	9.03	4.78
1.80V/cell	155.1	132.7	116.1	92.1	70.7	56.9	32.8	24.3	19.3	16.2	14.1	11.25	9.44	5.00
1.75V/cell	170.8	144.7	123.4	95.8	73.4	58.6	33.8	24.7	19.6	16.4	14.2	11.39	9.55	5.05
1.70V/cell	183.9	152.9	130.0	100.2	75.5	60.1	34.5	25.2	20.0	16.7	14.5	11.59	9.61	5.08
1.67V/cell	192.0	159.3	134.5	102.8	77.1	61.4	35.1	25.4	20.1	16.9	14.6	11.69	9.69	5.11
1.60V/cell	199.6	164.4	137.9	104.9	78.3	62.3	35.6	25.5	20.3	17.0	14.7	11.78	9.74	5.14

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	260.0	228.9	205.2	166.9	131.0	106.2	62.3	45.5	36.6	30.9	26.9	21.8	18.2	9.66
1.80V/cell	293.2	253.6	223.2	178.9	138.1	111.5	64.8	48.1	38.3	32.4	28.2	22.6	19.0	10.1
1.75V/cell	320.6	274.7	236.0	185.1	142.9	114.6	66.6	48.9	38.9	32.6	28.5	22.8	19.1	10.1
1.70V/cell	340.7	287.0	246.0	191.8	145.8	116.7	67.6	49.7	39.5	33.1	29.0	23.2	19.2	10.2
1.67V/cell	350.1	294.6	251.3	194.5	147.5	118.1	68.4	49.9	39.7	33.3	29.2	23.4	19.4	10.2
1.60V/cell	356.4	299.1	254.1	196.3	148.2	118.7	68.9	49.8	39.8	33.5	29.5	23.6	19.5	10.3





Specifications subject to change without notice.




Dimensions

T6 Terminal


Unit: mm

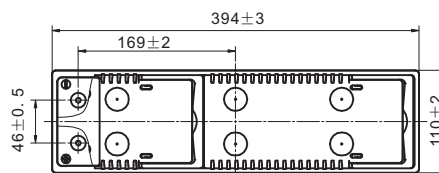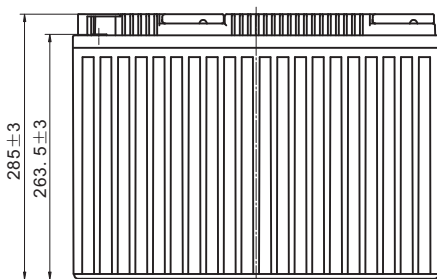


Discharge Characteristics

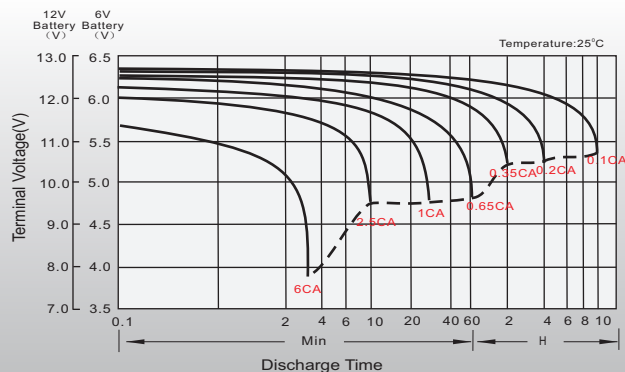



Float Charging Characteristics

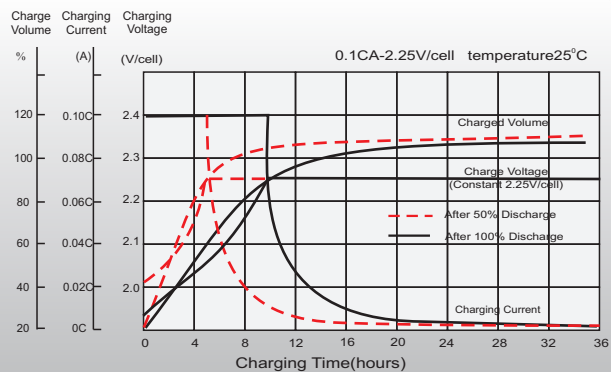

Temperature Effects in Relation to Battery Capacity

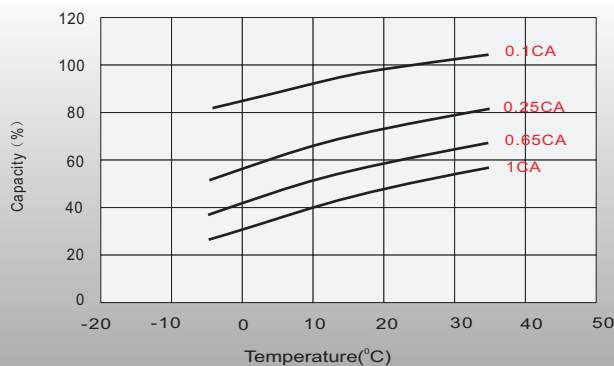

Effect of Temperature on Long Term Float Life

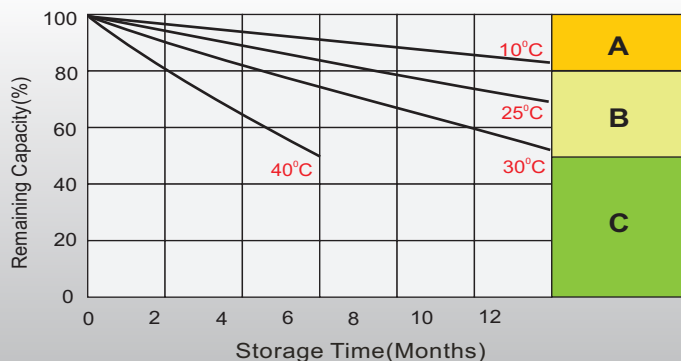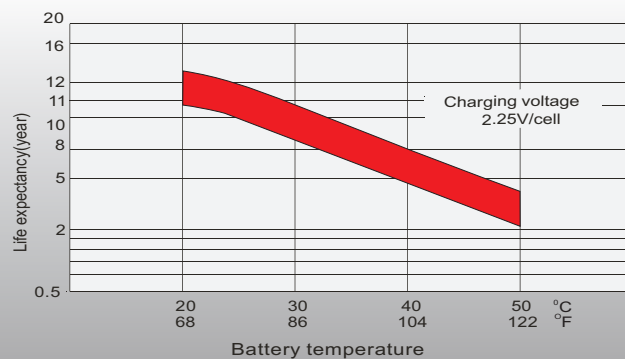

Self Discharge Characteristics

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8~10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

Sales Office

Finland and Baltic countries

Celltech Oy
Höyläamitie 11 A, 00380 Helsinki, Finland
TEL: +358 (0) 207 999 640
E-mail: info@celltech.fi
www.celltech.fi

Denmark

Celltech A/S
Lejrvej 25, 3500 Værløse, Denmark
TEL: +45 7025 2201
E-mail: info@celltech.dk
www.celltech.dk

Norway

Staubo Elektro-Maskin AS
Bjoernerudveien 12 C, 1266 Oslo, Norway
TEL: +47 22 75 35 00
E-Mail: post@staubo.no
www.staubo.no