


Specification		Code:460-6240
Nominal Voltage	12V	
Nominal Capacity(10HR)	170.0AH	
Dimension	Length	550±3mm (21.6 inches)
	Width	125±2mm (4.93 inches)
	Container Height	280±3mm (11.0 inches)
	Total Height (with Terminal)	280±3mm (11.0 inches)
Approx Weight	Approx 54.0 Kg (119.1 lbs)	
Terminal	T13-A	
Container Material	ABS	
Rated Capacity	180.0 AH/9.00A	(20hr, 1.80V/cell, 25°C/77°F)
	170.0 AH/17.0A	(10hr, 1.80V/cell, 25°C/77°F)
	160.8 AH/20.2A	(8hr, 1.80V/cell, 25°C/77°F)
	148.0 AH/29.6A	(5hr, 1.75V/cell, 25°C/77°F)
	110.5 AH/110.5A	(1hr, 1.67V/cell, 25°C/77°F)
Max. Discharge Current	1360A (5s)	
Internal Resistance	Approx 3.2mΩ	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 51.0A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Standby Use	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Capacity affected by Temperature	CT series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Self Discharge		



Applications

- ◆ For standard 19 inches or 23 inches power cabinets
- ◆ Network connection equipment of communication system
- ◆ Power system of special network or local area network
- ◆ UPS, standby power supply
- ◆ Power station systems
- ◆ Railway and marine systems

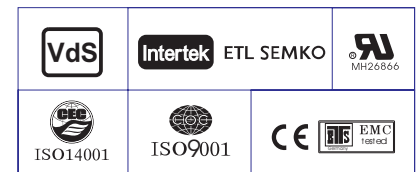

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	245.8	216.2	193.8	158.8	122.4	98.9	57.7	42.2	33.8	28.4	24.6	19.5	16.3	8.61
1.80V/cell	285.6	249.6	216.2	170.7	129.4	103.5	59.8	43.7	34.9	29.2	25.2	20.2	17.0	9.00
1.75V/cell	315.2	268.6	230.5	177.5	133.5	106.6	61.1	44.4	35.3	29.6	25.6	20.5	17.2	9.09
1.70V/cell	335.6	281.5	239.7	183.6	136.0	108.3	62.0	45.0	35.8	29.9	25.9	20.8	17.4	9.15
1.67V/cell	350.9	291.0	244.8	187.3	138.9	110.5	62.8	45.4	36.2	30.3	26.2	21.0	17.5	9.20
1.60V/cell	366.2	299.2	251.9	191.1	141.0	112.2	63.6	46.0	36.5	30.6	26.4	21.2	17.7	9.25

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	459.0	407.8	369.2	305.8	237.7	192.8	113.2	83.1	66.8	56.2	48.8	38.9	32.5	17.2
1.80V/cell	527.1	464.4	405.9	323.7	249.4	200.7	116.5	85.6	68.5	57.6	49.9	40.2	33.9	18.0
1.75V/cell	572.4	493.8	428.7	333.9	254.9	205.7	118.7	86.7	69.2	58.1	50.5	40.7	34.3	18.1
1.70V/cell	595.8	510.4	442.4	343.5	258.7	208.3	120.1	87.7	70.0	58.5	51.0	41.1	34.6	18.2
1.67V/cell	620.6	525.5	450.0	349.8	263.4	212.0	121.5	88.3	70.6	59.2	51.4	41.5	34.9	18.3
1.60V/cell	629.8	529.5	456.6	352.2	264.4	213.2	121.9	88.7	70.9	59.5	51.7	41.8	35.1	18.4




Specifications subject to change without notice.




Dimensions

T13 Terminal


Unit: mm [inches]

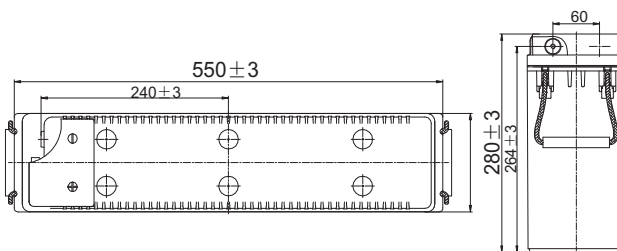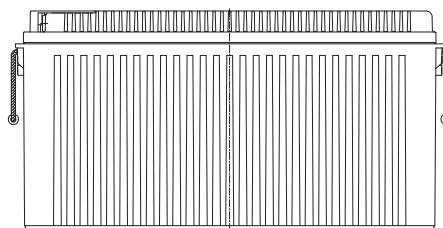


Discharge Characteristics

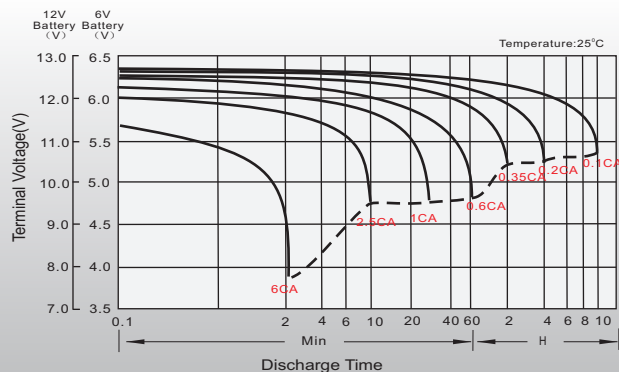



Float Charging Characteristics

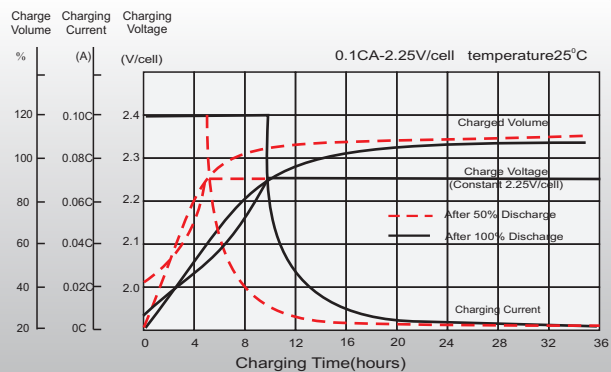

Temperature Effects in Relation to Battery Capacity

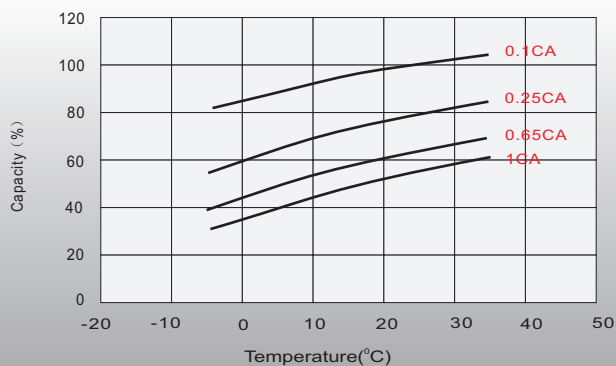

Effect of Temperature on Long Term Float Life

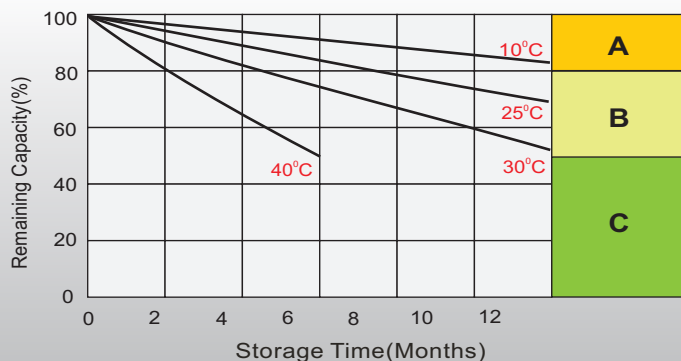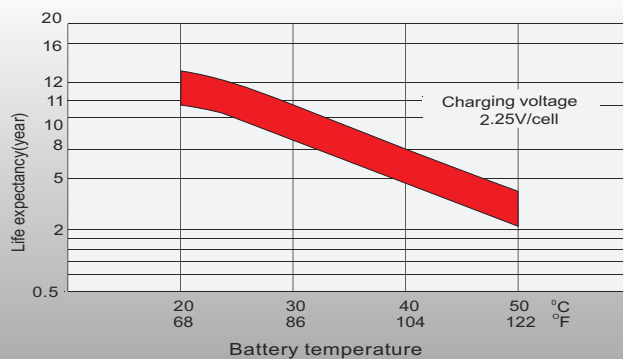

Self Discharge Characteristics

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

Sales Office

Finland and Baltic countries

Celltech Oy
Höyläamitie 11 A, 00380 Helsinki, Finland
TEL: +358 (0) 207 999 640
E-mail: info@celltech.fi
www.celltech.fi

Denmark

Celltech A/S
Lejrvej 25, 3500 Værløse, Denmark
TEL: +45 7025 2201
E-mail: info@celltech.dk
www.celltech.dk

Norway

Staubo Elektro-Maskin AS
Bjoernerudveien 12 C, 1266 Oslo, Norway
TEL: +47 22 75 35 00
E-Mail: post@staubo.no
www.staubo.no