




CAT6A 4P F/FTP LSZH AWG23 White cable (500 m drum)

GGM C6AFF4PZHT5

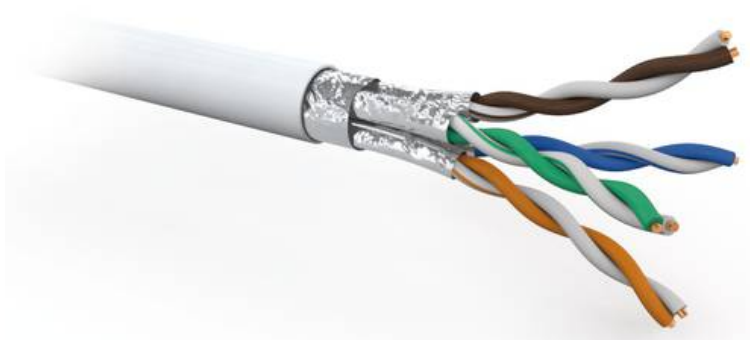

Thanks to cutting edge technologies, this cable is manufactured in a way to exceed the ISO, ANSI/TIA and CENELEC for Class EA, Category 6A applications. It Can easily be integrated into a Class EA link, in order to support applications up to 10GBASE-T (10Gbits Ethernet). It has a good shielding effectiveness with global and individual screened pairs (F/FTP). Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

Specifications

- Available packing: 500 m drum
- Standards:
 - ISO/IEC 11801 Ed.2.2
 - EN 50173-1, EN 50173-2 et EN 50173-5
 - ISO/IEC 24764
 - IEC 61156-5 : Edition 2.0 2009-02,
 - ANSI/TIA-568-C.2
- Jacket: White RAL9003
- Overall diameter: 7.3 mm
- Insulation diameter: 1.38 mm
- Frequency range: from 0 to 550 MHz
- Characteristic impedance: 100 Ω
- Al-laminated plastic foil, global and on each pairs, with drain wire- F/FTP
- LSZH (IEC 60754, IEC 61034 & IEC 60332-1)
- Nominal velocity of propagation: 82 %