


## **Plastic bodied limit switch**

Series IN73

Description IN73-S02 M20

Article number 6081000116

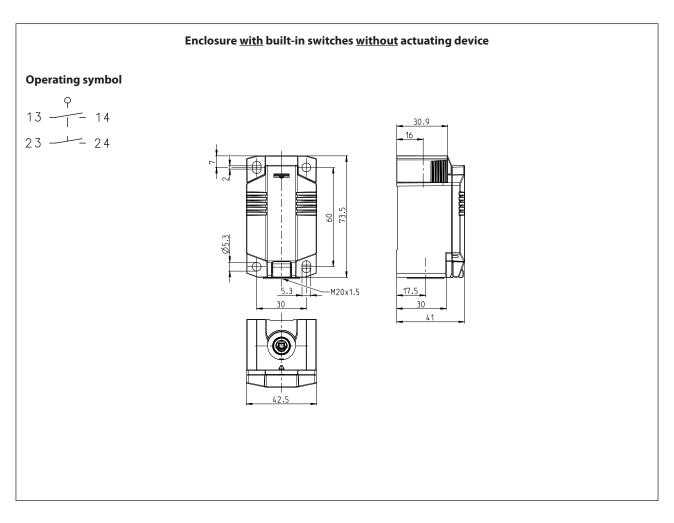

Electrical Data		
Rated insulation voltage	U <sub>i</sub>	400 V
Rated impulse withstand voltage	$U_{imp}$	4 kV
Rated operational voltage	U <sub>e</sub>	240 V AC / 24 V DC
Rated supply frequency AC		50 / 60 Hz
Overvoltage category		II acc. EN 60947-1 annex H table H1
Conv. thermal current	l <sub>the</sub>	5 A
Minimum current		1 mA
Utilization category		AC 15, U <sub>e</sub> /I <sub>e</sub> 240 V / 3 A; DC 13, U <sub>e</sub> /I <sub>e</sub> 24 V / 1,5 A
Short-circuit protective device		Fuse 4 A gG
Rated conditional short-circuit current		400 A
Protection class		II, totally insulated

## **Technical Data**



Mechanical data		
Enclosure		Thermoplastic, glass fibre reinforced (UL 94-V0)
Cover		Thermoplastic, glass fibre reinforced (UL 94-V0)
Actuating force	$F_{bmin}$	14 N + Force of the actuating device
Operating temperature		-30 °C +75 °C
Storage temperature		-40 °C +80 °C
Protection type		IP66 / IP67 acc. EN 60529, Type 4X – Indoor Use only
Pollution degree (built-in switch)		3
Contact material		silver
Device Class (built-in switch)		Category E (MC3+CC2+SC1) acc. EN 60947-1 annex Q
Contact type		2 N.O.
Operating rate	V	0,06 m/min ≤ V ≤ 30 m/min
Bounce duration	ms	< 3 ms
Switchover time	ms	< 8 ms
Switching frequency		≤ 60 / min.
Mechanical life		15 x 10 <sup>6</sup> operating cycles
Mission time		≤20 years
Connection		4 screw connections (M3)
Conductor cross-sections		Solid or Litz wire with ferrules 0,34 mm <sup>2</sup> - 1,5 mm <sup>2</sup> ; AWG 22-16
Cable entrance		1 x M20 x1,5
Weight		≈ 0,11 kg
Installation position		operator definable

Standards	
	DIN EN 60947-5-1
	UL 508 / CSA C22.2 No.14

<b>EU Conformity</b>	
	acc. to directive 2014/35/EU (Low-Voltage-Directive)

Approvals	
	CCC
	$_{c}UL_{US}$

## Notes

The degree of protection (IP code) specified applies solely to a property closed cover and the use of an equivalent cable gland with adequate cable.

The information on the switching travel can be found in the data sheets of the actuator, as these depend on the actuator used.

Approvals / properties applies only to the fully assembled device.