

# AMTRON® STANDARD E

WALLBOX FOR ELECTRIC VEHICLES



MENNEKES AMTRON® designed for private and semi-public use



## **Variants**

Key switch

LED status display Reset function button

#### Standard E

Charging socket type 2 with hinged li	d
---------------------------------------	---

Order no.

**3,7 / 7,4 kW** \* 1358400 **11 / 22 kW** \* 1358401



#### Charging socket with shutter (version "T2S")

Order no.

**3,7 / 7,4 kW** \* 1358600 **11 / 22 kW** \* 1358601



## 7,5 meter permanently connected charging cable with connector type 2 (version "C2")

Order no.

**7,4 kW** 1358203 **22 kW** 1358202



www.chargeupyourday.de MENNEKES | 2

<sup>\*</sup>If AMTRON is configured to more than 20A via the dip switches, all charging cables with less than ≤ 20A are rejected, which means that charging cannot be carried out. In this state only 32A cables are accepted.




### **Product features**

- Overall
  - Charging acc. Mode 3 (IEC 61851)
  - Vehicle connectors and charging socket acc. IEC 62196
  - Charging capacity up to 22kW
  - Status information through LED info bar
  - Unlocking function in case of power failure (only for devices with charging socket type 2)
  - Integrated cable suspension
- Authorisation by key switch
- Reset function
- Enclosure
  - Enclosure made of AMELAN®




## **Assembly**

#### Front view

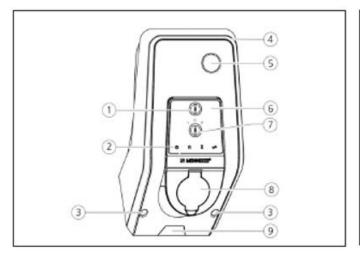

- 1. Reset button
- 2. LED Info bar
- 3. Fastening srews für upper housing part
- 4. Upper enclosure section
- 5. Energy meter with inspection window 1)
- 6. Front panel
- 7. Key switch
- 8. Charging socket type 2 with hinged lid 2)
- 9. Pre-cut recess for supply cable /cable duct
  - 1) Not for Standard E variants
  - Only for version with type 2 charging socket without shutter

#### Rear view

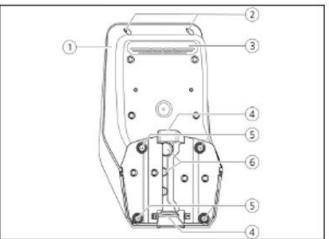

- 1. Base part
- 2. Fastening screws for upper housing part
- 3. Passive ventilation
- 4. Recess for supply line/ cable duct
- 5. Fastening holes
- 6. Cable entries

www.chargeupyourday.de



## **Technical data**


Type-dependent data		AMTRON® Standard E			
Rated voltage U <sub>N</sub> [V] AC ± 10%		230	230	400	400
Rated frequency f <sub>N</sub> [Hz]		50			
Rated Current InA [A]		16	32	16	32
Max. back-up fuse [A]		According to type label/ configuration			
Max. charging capacity mode 3 [kW]		3,7	7,4	11	22
Rated current of charging point mode 3 Inc [A]		16 - 1 ph	32 - 1 ph	16 - 3 ph	32 - 3 ph
Terminal strip supply line	Number of terminals	3	3	5	5
	Rated cross section (mm²)	rigid 3 x 6 flexible 3 x 4	rigid 3 x 10 flexible 3 x 6	rigid 5 x 6 flexible 5 x 4	rigid 5 x 10 flexible 5 x 6
	Tightening torque (Nm)	max. 0,8	max. <b>1,</b> 8	max. 0,8	max. 1,8
Rated insulation voltage U <sub>i</sub> [V]		500			
Rated impulse withstand voltage U <sub>imp</sub> [kV]		4			
Rated short circuit current I <sub>CC</sub> [kA]		10			
Rated diversity factor RDF		1			
Earth system		TN / TT			
EMC classifikation		A+B			
Protection class		II .			
Degree of protection		IP 44: Permanently attached charging cable IP 54: Charging socket type 2 with hinged lid			
Overvoltage category		<b>  </b>			
Resistance to mechanical impact		IK 10			
Pollution degree		3			
Setting up		Indoor or outdoor			
Condition of installation		Stationary equipment			
Usage		AEVCS			
Mounting method		Wall mounted			
Dimensions H x W x D [mm]		475 x 259 x 220			
Weight [kg]		5 - 8,5			
Control fuse (MCB)		6A, 2p, characteristic B			
Load contactor			32A, 4p	16A, 4p	32A, 4p
Standard		DIN EN 61851-1, DIN IEC / TS 61439-7			

Environmental conditions				
Ambient air temperature	nbient air temperature -25+40 °C			
Average temperature within 24 hours	<35°C			
Altitude	Max. 2000m above sea level			
Relative humidity	Max. 95 % (non-condensing)			


www.chargeupyourday.de MENNEKES | 5



# **Dimensions** [mm]

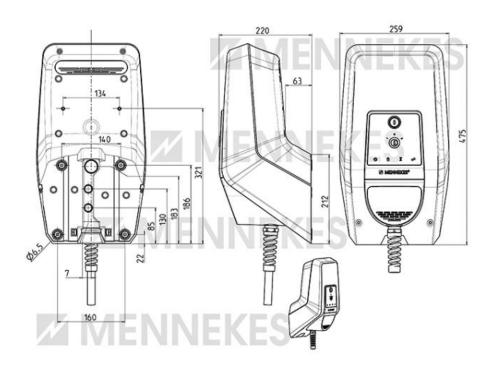

# **Mounting distance [mm]**

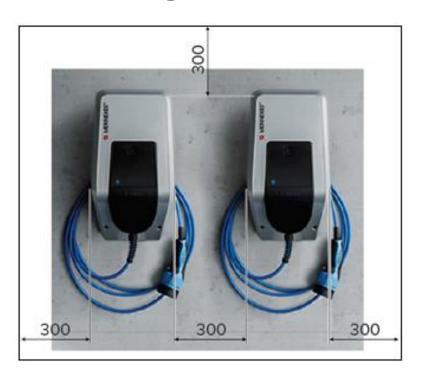

www.chargeupyourday.de MENNEKES | 6 T



#### **MENNEKES**

Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1 57399 KIRCHHUNDEM GERMANY

Phone: + 49 2723 41-1 Fax: + 49 2723 41-214 info@MENNEKES.de