

Polebox 205 D2



Assembly and installation accessories
Charging box mount
Next Green - Polebox 205 D2


Model

E number: 24 804 40
S-No: 34 079 03
Name
Charging box mount Polebox 205 D2



POLEBOX 205 D2 FEATURES

- For mounting two chargers back-to-back
- Robust sheet steel construction
- Easy to mount on post tubes
- A large part of the installation can be prepared indoors
- Diffusion terminal for easy extension of the service
- Prepared for mounting two earth fault circuit breakers, 3G / 4G router
- Powder coated, available in various colors. Contact Next Green for more information.

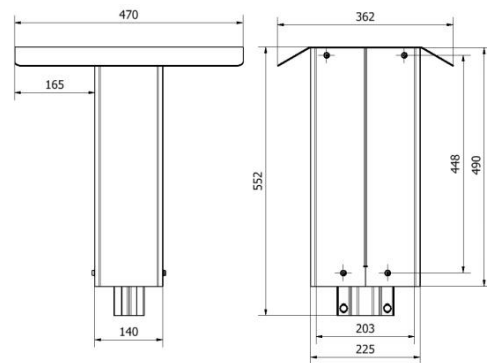

Technical specifications

Material
Color

High-strength steel
Graphite grey

Dimensions

Weight 11 kg
Height 552 mm
Width 362 mm
Depth 470 mm
Mounting surface 203 mm

Packaging dimensions

Weight 11 kg
Height 570 mm
Width 310 mm
Depth 180 mm

SELECTION OF COMPATIBLE CHARGING BOXES

- ABB Terra AC
- Charge Amps Halo
- Easee Home
- Easee Charge
- Elinta Homebox Slim
- Garo GLB
- Wallbox Pulsar
- Wallbox Copper SB
- Zaptec GO

Next Green Polebox is a post mount for charging boxes for mounting on a 60 mm pipe post. Polebox makes it easy, for example when changing from engine heater location to charging location and can therefore be used to replace an engine heater hood. The product is intended for feeding electrical cables inside the pole tube.

Polebox has a built-in distribution terminal for up to 2 x 5G25 power cable for extending the connection to the next charging post. From the distribution terminal in the Polebox, the respective charging box is then connected using a 5G2.5 rubber cable.

Polebox can be optionally equipped with DIN rails for mounting e.g., up to two earth fault circuit breakers, Wi-Fi router or 3G/4G modem and power supply. Everything is kept in the box.

Polebox is made of Swedish steel and powder coated to provide the highest quality.

Polebox is adapted to several different charging box models. Hole pattern for charging box is drilled during installation.

Polebox is very easy to assemble. It can be prepared indoors by mounting charging boxes and unplugging the wiring from the dispersion terminal. Polebox is then put in place outside on the appropriate tube. The charger hood is lifted and then hooked up. This provides easy access for screwing supply wires into the plinth.

Suitable for charging boxes with a maximum hole pattern width of 203mm and 430mm high.

Polebox 205 D2



Montage- och installationstillbehör
Laddboxhållare
Next Green - Polebox 205 D2

Modell


E Nummer:
24 804 40
S-No:
34 079 03

Benämning
Laddboxhållare Polebox 205 D2



FUNKTIONER POLEBOX 205 D2

- För montage av två laddare rygg mot rygg
- För montage på 60mm stolprör
- Robust konstruktion i höghållfast stålplåt
- Stor del av installationen kan förberedas inomhus
- Spridningsplint för enkel vidarekoppling av servisen
- Förberedd för montering av två jordfelsbrytare, 3G/4G-router
- Pulverlackerad, kan levereras i olika kulörer. Kontakta Next Green för mer information.

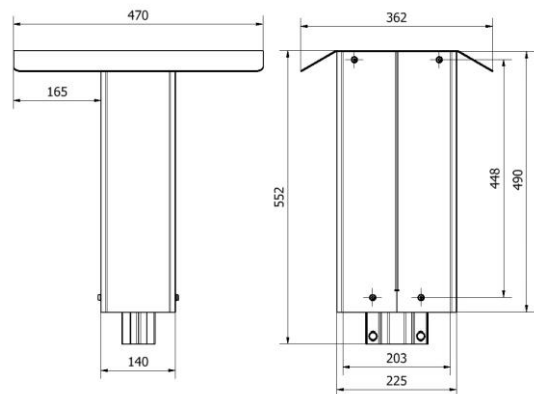

Tekniska specifikationer

Material
Kulör Stål, höghållfast stål, pulverlackerad
Grafitgrå

Dimensioner
Vikt 11 kg
Höjd 552 mm
Bredd 362 mm
Djup 470 mm
Monteringsyta 203 mm

Dimensioner förpackning
Vikt 11 kg
Höjd 570 mm
Bredd 310 mm
Djup 180 mm

URVAL KOMPATIBLA LADDBOXAR

- ABB Terra AC
- Charge Amps Halo
- Easee Home
- Easee Charge
- Elinta Homebox Slim
- Garo GLB
- Wallbox Pulsar
- Wallbox Copper SB
- Zaptec GO

Next Green Polebox är ett stolpfäste för laddboxar, avsett för montage på 60 mm rörstolpe. Polebox underlättar till exempel vid byte från motorvärmplats till laddplats och kan alltså användas för att ersätta en motorvärmhuv. Produkten är avsedd för matning av elkabel inuti rörstolpen.

Polebox har en inbyggd fördelningsplint för upp till 2 x 5G25 elkabel för vidare koppling till nästa laddstolpe. Från fördelningsplinten i Polebox ansluts sedan respektive laddbox med 5G2,5 gummikabel.

Polebox kan extrautrustas med DIN-skenor för montage av till exempel upp till två jordfelsbrytare, Wifirouter eller 3G/4G-modem och nätaggregat. Allt ryms i lådan.

Polebox är tillverkad av svenskt stål och pulverlackad för högsta kvalitet.

Polebox är anpassad för flera olika modeller av laddboxar. Hålbild för laddbox borras vid installation.

Polebox är mycket enkel att montera. Den kan förberedas inomhus med att montera laddboxar och dra kablagen från spridningsplinten. Ute på plats placeras Polebox på det befintliga röret. Huven med laddarna lyfts och hakas sedan upp. Detta underlättar att komma åt för att skruva fast matarledningarna i plinten.

Passar laddboxar med maximal hålbild 203mm bred samt 430mm hög.