


3 CONNECTORS END-OUTLET

FM/TV-SAT1-SAT2




REF.	ART. NR.	DESCRIPTION	EAN 13
524501	SE33TWIN-ST	END-OUTLET FM/TV-SAT1-SAT2	8424450188606

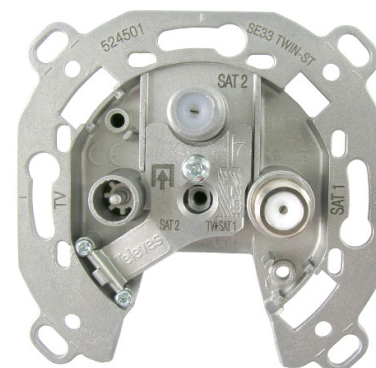

End outlet for terrestrial and satellite signal (up to 2) with two inputs (FM/TV/SAT1 and SAT2). It offers 3 outputs connections with the following bands: FM/TV ("IEC" male connector), SAT1 ("F" female connector) and SAT2 ("F" female connector)

- The inner conductor has a fast and secure crimp. It is inserted and fixed by pressure, although with a fastening equivalent to a screw.
- Conical guide, "F" connector type, to introduce in a simple way the inner conductor.
- Inner connection length with a wide margin, making more difficult the cut off between the inner conductor and the braid
- Tilting and self-opening clamp with full opening. Its surface is serrated with three lines for a perfect fixation to the braid
- Chassis with rounded edges to avoid cuts.
- Die-cut chassis to facilitate the input connections
- Screening Class A



REF.	ART. NR.	 mm / in (xyz)	 g / lb	 U./Pack.
524501	SE33TWIN-ST	70 x 67 x 36 2.75 x 2.63 x 1.41	94 / 0.21	10 / box



Reference Art. Nr.			524501 SE33TWIN-ST		
Band		MHz	5...862	862...2400	950...2400
Connector			"IEC" male	"F" female	"F" female
Isolation	FM/TV - SAT1	dB	20 typ.		
	SAT1 - SAT2		30		
Attenuation	Out: FM/TV	dB	1		
	Out: SAT1		1.5		
	Out: SAT2		1		
DC Pass		V - mA	-	40 - 0.5	50 - 1