

LED indoor light without sensor

RS PRO P1

V3 Neutral white

EAN 4007841 056049

Article number 056049



Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P1 integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the sensor version by cable. Output: 8,2 W with 974 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	280 x 110 mm	Lamp	LED cannot be replaced
With lamp	Yes, STEINEL LED system	Base	without
With motion detector	No	LED cooling system	Passive Thermo Control
Manufacturer's Warranty	5 years	Soft light start	Yes
Version	Neutral white	Main light adjustable	No
PU1, EAN	4007841056049	Interconnection via	Cable
Colour	white	Lebensdauer LED nach IEC-62717 (L70)	100.000 h
Installation site	wall, ceiling	Lebensdauer LED nach IEC-62717 (L80)	73.000 h
Impact resistance	IK03	Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
IP-rating	IP54	Lebensdauer LED nach IES TM-21 (L80)	>60.000 h
Protection class	II	Absicherung B10 (ST)	54
Ambient temperature	-10 – 40 °C	Absicherung B16 (ST)	87
Housing material	Plastic	Absicherung C10 (ST)	90
Cover material	Plastic, opal	Absicherung C16 (ST)	145
Mains power supply	220 – 240 V / 50 – 60 Hz	Output	8,2 W
Luminous flux total product	974 lm	Colour Rendering Index CRI	= 82
Total product efficiency	119 lm/W	Photobiological safety in accordance with EN 62471	RG1
Colour temperature	4000 K	Starting current, maximum	13 A

LED indoor light without sensor

RS PRO P1


V3 Neutral white

EAN 4007841 056049


Article number 056049




Dimension Drawing

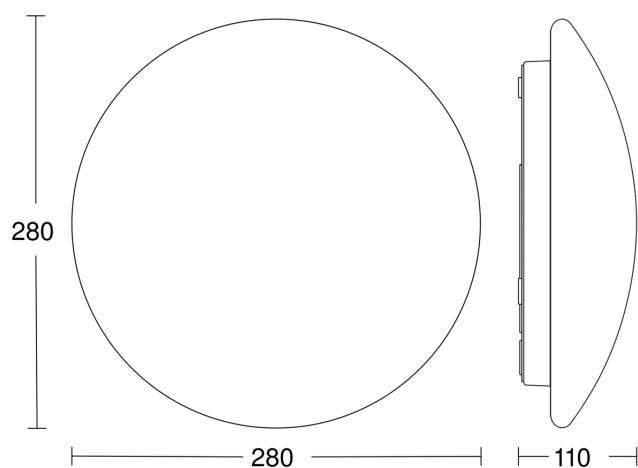

Master circuit diagram



Master/slave interconnection circuit diagram

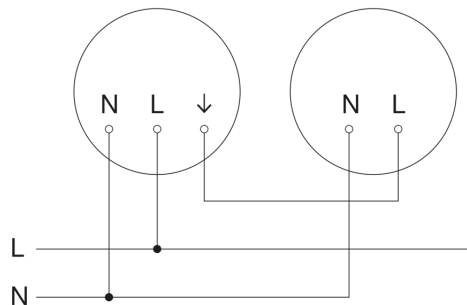

Master/slave interconnection circuit diagram

