


Systimax Solutions
700008485 | N-002-DS-6F-FSUOR
Low Smoke Zero Halogen Riser Distribution Cable, 2 fiber single-unit

Representative Image

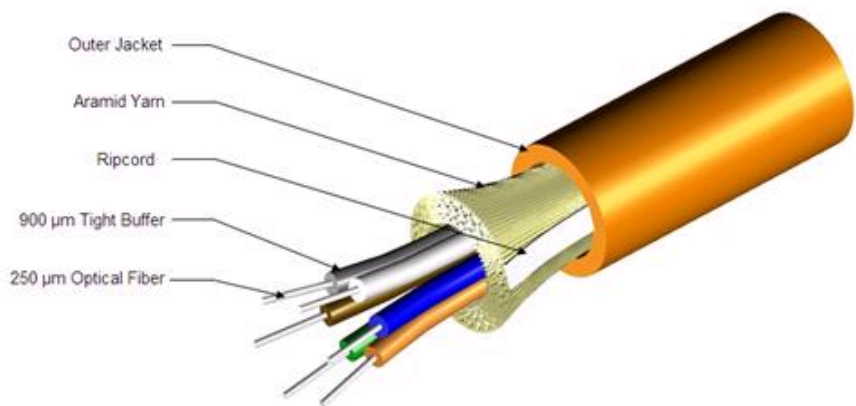

General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	OptiSPEED®, 62.5 µm multimode fiber (OM1)
Total Fiber Count	2
Fiber Type	OptiSPEED®, 62.5 µm multimode fiber (OM1)
Fiber Type, quantity	2
Jacket Color	Orange

Dimensions

Cable Weight	12.0 kg/km 8.1 lb/kft
Diameter Over Jacket	3.80 mm 0.15 in
Height Over Jacket	3.71 mm 0.15 in

Physical Specifications

Minimum Bend Radius, loaded	5.6 cm 2.2 in
Minimum Bend Radius, unloaded	3.7 cm 1.5 in
Tensile Load, long term, maximum	45 lbf 200 N

700008485 | N002-DS-6F-FSUOR

Tensile Load, short term, maximum 150 lbf | 667 N
Vertical Rise, maximum 500.0 m | 1640.4 ft

Flame Test Specifications

Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3 IEC 60754-2 IEC 61034-2 IEEE 383 UL 1666 UL 1685

Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH) Riser
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

Mechanical Test Specifications

Compression	10 N/mm 57 lb/in
Compression Test Method	FOTP-41 IEC 60794-1-2, Section 7
Flex	100 cycles
Flex Test Method	FOTP-104 IEC 60794-1-2, Section 10
Impact	4.34 ft lb 5.88 N-m
Impact Test Method	FOTP-25 IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1-2, Section 11

Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-28 IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1-2, Section 22

Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-83-596-2001 Telcordia GR-409-CORE Issue 2
-------------------------------	---

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



700008485 | N-002-DS-6F-FSUOR

Included Products

CS-6F-TB (Product Component—not orderable) — OptiSPEED® OM1 Multimode Fiber