


## EMSKE 25 EMV-Z

Ex-EMC cable gland, earthing cones DIN 89345, brass nickel-plated, M25



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

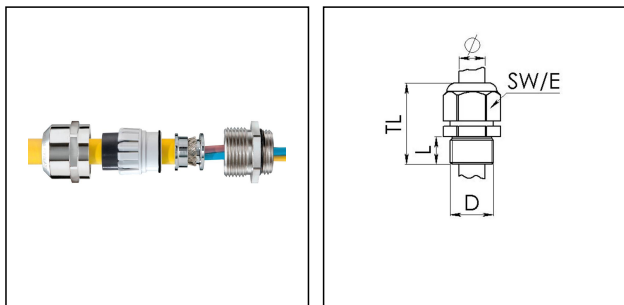

|                            |                            |
|----------------------------|----------------------------|
| Material cable gland       | Brass nickel-plated        |
| Material clamping cage     | Polyamide                  |
| Material sealing gasket    | EPDM                       |
| Material earthing insert   | Brass chromium-plated      |
| Temp. range min            | -40 °C                     |
| Temp. range max            | 75 °C                      |
| Protection class           | IP66 / IP68 (5 bar 30 min) |
| Type of protection         | Ex eb, Ex tb               |
| Ex-Certificate             | ATEX, IECEx                |
| Thread type                | M                          |
| Ø Connection thread D      | 25                         |
| Lead                       | 1,5                        |
| Length screw-in thread L   | 7 mm                       |
| Ø cable diameter min       | 10 mm                      |
| Ø cable diameter max       | 17 mm                      |
| Ø cable below cable shield | 16 mm                      |
| Ø cable diameter UL        | 10,8 mm - 15,8 mm          |
| Key width SW               | 29 mm                      |
| Collar diameter (E)        | 32 mm                      |
| Total length TL            | 33 mm - 42 mm              |
| Install. torques fitting   | 10 N m                     |
| Install. torques cap nut   | 10 N m                     |
| Surface                    | Nickel-plated              |
| Order no. nickel-plated    | 10065059                   |
| Type                       | EMSKE 25 EMV-Z             |

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Packing unit

50

ETIM-Classification

EC000441

## Recommended accessories

|             |          |
|-------------|----------|
| RDE 25      | 10060768 |
| EMMU-EMV 25 | 10063213 |
| BS 17       | 10064012 |

20.06.2021


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

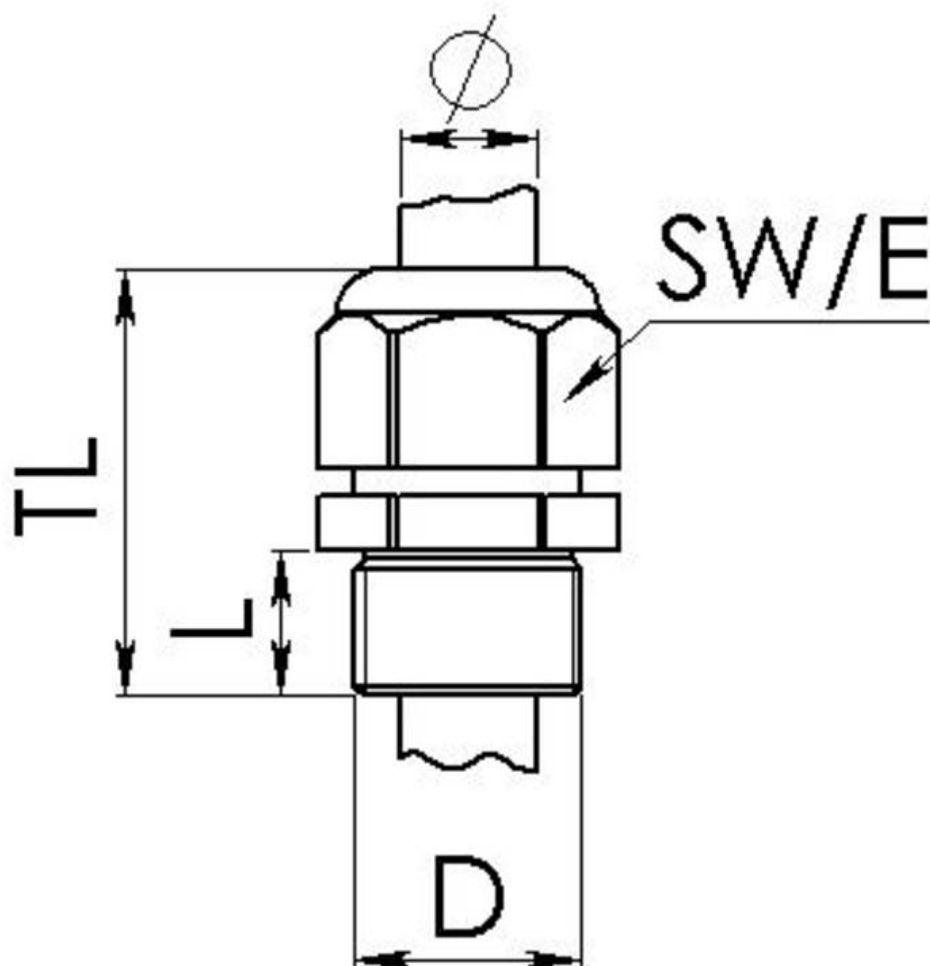

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice