


## NMSKE 3/8

Ex-cable gland, brass nickel-plated, NPT 3/8"



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

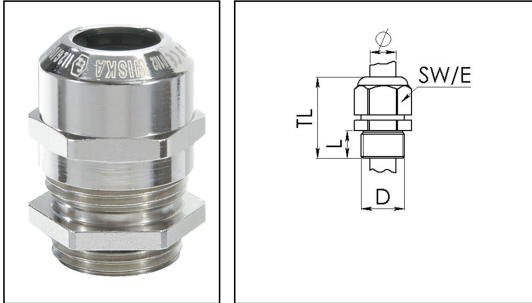

|                          |                            |
|--------------------------|----------------------------|
| Material cable gland     | Brass nickel-plated        |
| Material clamping cage   | Polyamide                  |
| Material sealing gasket  | EPDM                       |
| Temp. range min          | -40 °C                     |
| Temp. range max          | 75 °C                      |
| Protection class         | IP66 / IP68 (5 bar 30 min) |
| Type of protection       | Ex eb, Ex tb               |
| Ex-Certificate           | ATEX, IECEx                |
| Thread type              | NPT                        |
| Ø Connection thread D    | 3/8"                       |
| Length screw-in thread L | 13 mm                      |
| Ø cable diameter min     | 5 mm                       |
| Ø cable diameter max     | 10 mm                      |
| Key width SW             | 20 mm                      |
| Collar diameter (E)      | 22 mm                      |
| Total length TL          | 35 mm - 42 mm              |
| Install. torques fitting | 4 N m                      |
| Install. torques cap nut | 4 N m                      |
| Surface                  | Nickel-plated              |
| Order no. nickel-plated  | 10101083                   |
| Type                     | NMSKE 3/8                  |
| Packing unit             | 50                         |
| ETIM-Classification      | EC000441                   |

Remarks:

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

When using a locknut NMMU, an additional connection thread gasket EADR must be used to achieve protection class IP66 / IP68.

**Recommended accessories**

|                 |          |
|-----------------|----------|
| <b>RDE 16</b>   | 10062184 |
| <b>EADR 16</b>  | 10062802 |
| <b>BS 10</b>    | 10064008 |
| <b>NMMU 3/8</b> | 10100973 |

20.06.2021

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · [www.wiska.com](http://www.wiska.com)



Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice