

## WEID.E1WF-16b / M16

Ex d cable gland, brass nickel-plated, M16



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



|                                |                     |
|--------------------------------|---------------------|
| Material cable gland           | Brass nickel-plated |
| Material sealing gasket        | Silicone            |
| Temp. range min                | -60 °C              |
| Temp. range max                | 110 °C              |
| Protection class               | IP66 / IP67         |
| Type of protection             | Ex eb, Ex tb, Ex db |
| Ex-Certificate                 | ATEX, IECEx         |
| Thread type                    | M                   |
| Ø Connection thread D          | 16                  |
| Lead                           | 1,5                 |
| Length screw-in thread L       | 15 mm               |
| Ø cable diameter min           | 12 mm               |
| Ø cable diameter max           | 15,1 mm             |
| Ø cable below cable shield max | 7 mm - 11 mm        |
| Key width SW                   | 25 mm               |
| Collar diameter (E)            | 27 mm               |
| Total length TL                | 82 mm               |
| Surface                        | Nickel-plated       |
| Order no. nickel-plated        | 50065538            |
| Type                           | WEID.E1WF-16b / M16 |
| Packing unit                   | 1                   |
| ETIM-Classification            | EC000441            |

03.08.2021


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

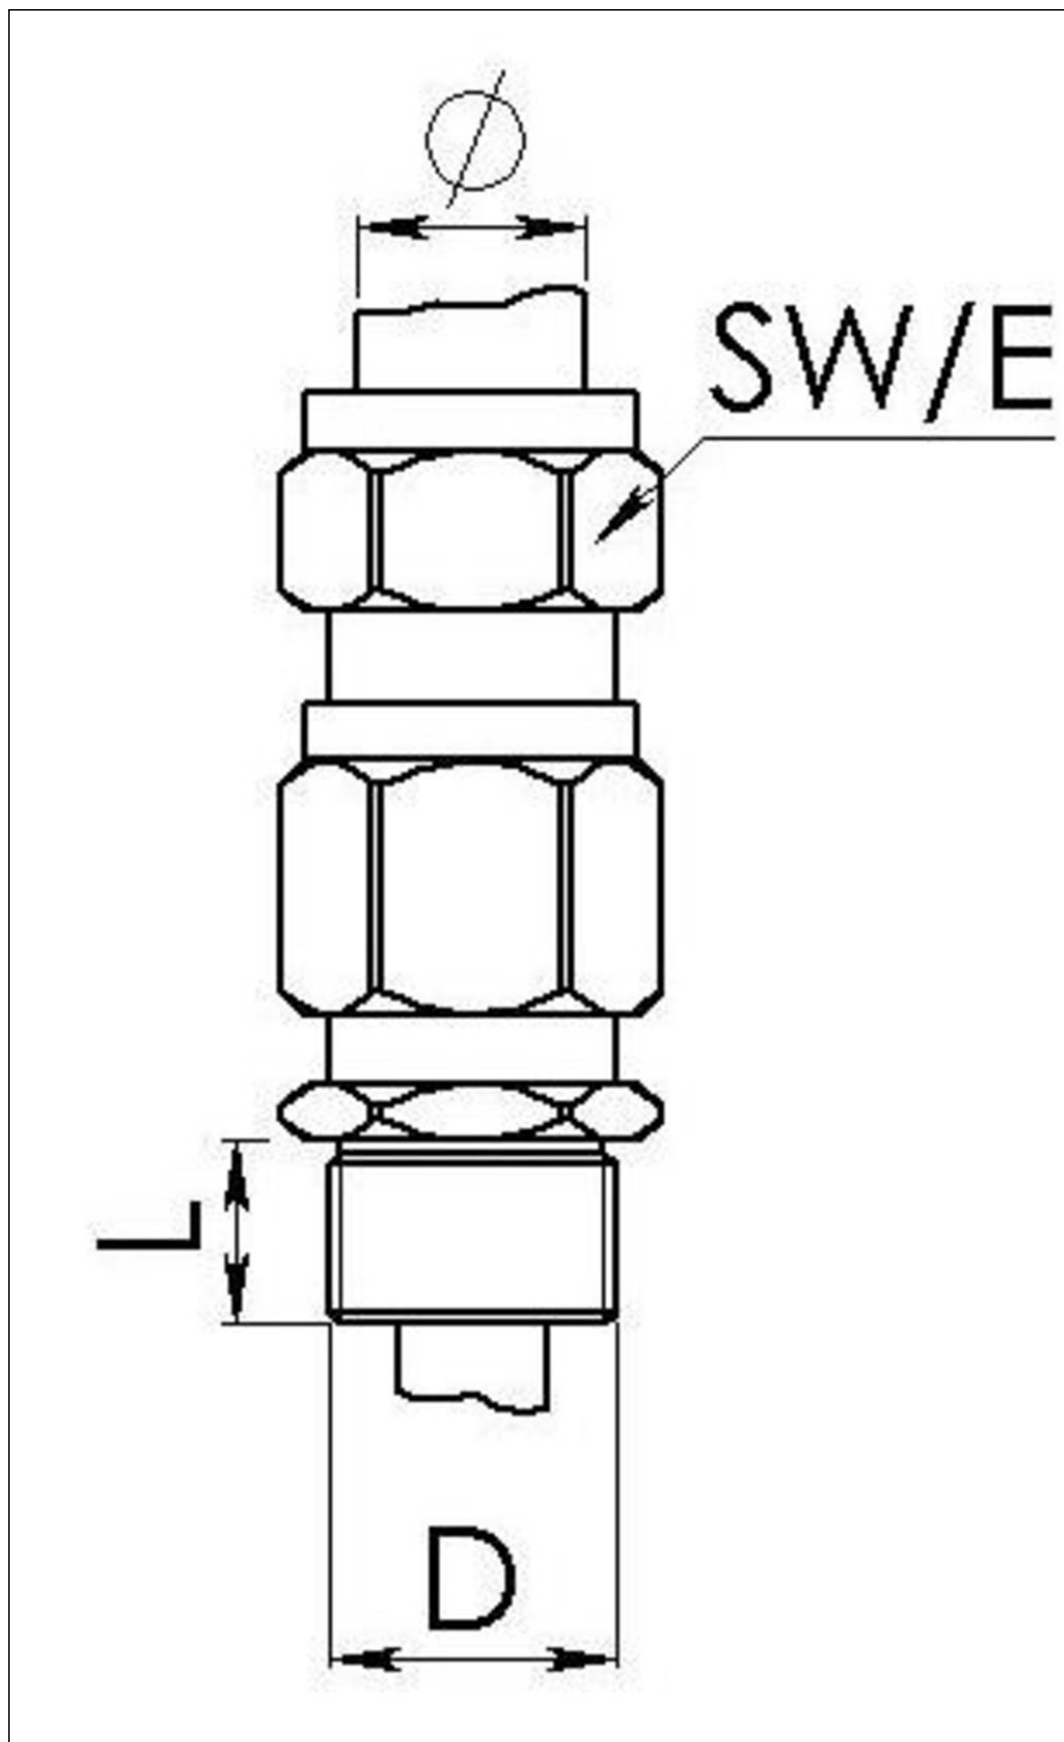

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com