


Tuotetiedot

Tuotekoodi	VC03-0003	Sähkönumero	1914142	EAN-koodi	6410019141429
Tuotenimi	OLE 185-300			ETIM-luokka	EC000897
Johtimet	1xAl/Cu 185-300 mm ²				

Tekniset tiedot


Nimellisvirta (IEC)	Cu	560	A
	Al	560	A
Nimellisjännite (IEC)		690	V
		-	
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		300	mm ²
Kiristysmomentti			
	185-300 mm ²	70	Nm
		-	
		-	
		-	
Käyttölämpötila		80	°C
Paino		260	g
IP-suojaus		IP20	
		-	
Väri / Materiaali	Liitin Ruostumaton teräs/ Tina pinnoitettu kupari; Kotelo PP66/ PC		
Kiinnitys / KytKentä	Ruuvi		

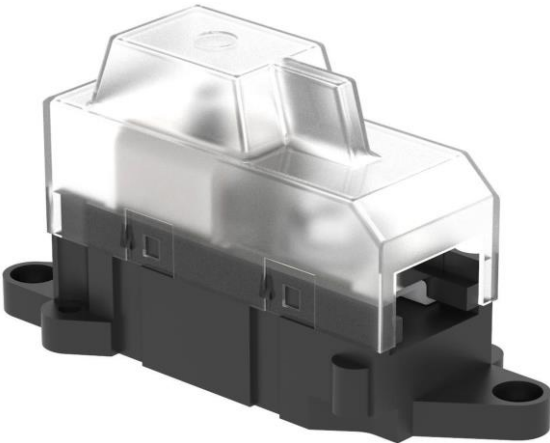

Kuvaus

OLE-yleisliitin on eristysalustallinen OL-liitin. Liittimet ovat tarkoitettu alumiini- ja kuparikaapeleiden liittämiseen. Liittimen kehys on ruostumatonta terästä ja liitinkisko/painin on tinapinnoitettua kuparia. OLE-liittimet voidaan asentaa vierekkäin, kiinnittämällä eristysalustat ruuvilla toisiinsa.

Mittakuva

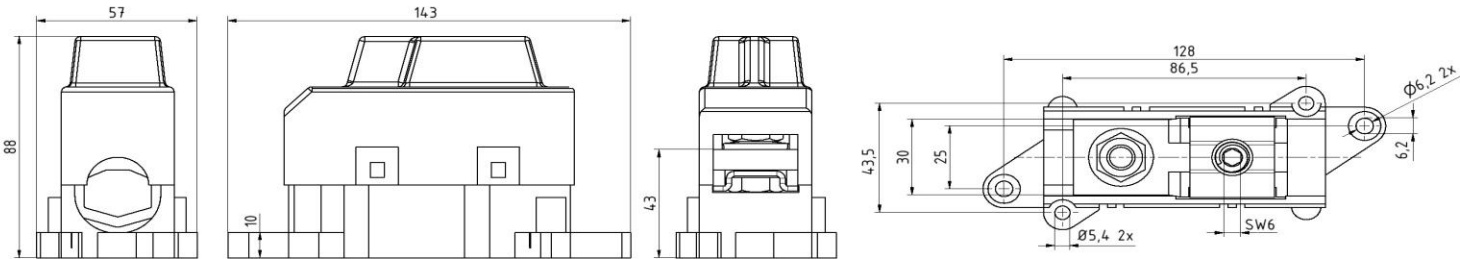

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	8	Paino [kg]	3,64
Pituus [mm]	300	Leveys [mm]	205	Korkeus [mm]	100

Ouneva Oy


Teollisuustie 21
FI-82730 Tuupovaara
Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi

Product data			
Product code	VC03-0003	STK-code	1914142
Product name	OLE 185-300	EAN-code	6410019141429
Wires	1xAl/Cu 185-300 mm ²	ETIM class	EC000897


Technical data			
Nominal current (IEC)	Cu	560	A
	Al	560	A
Nominal voltage (IEC)		690	V
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		300	mm ²
Tightening torque			
	185-300 mm ²	70	Nm
		-	
		-	
		-	
Max. Operating temperature		80	°C
Weight		260	g
IP-protection		IP20	
		-	
Color / Material	Connector Stainless steel/ Tin plated copper; Housing PP66/ PC		
Mounting / Connection	Screw		

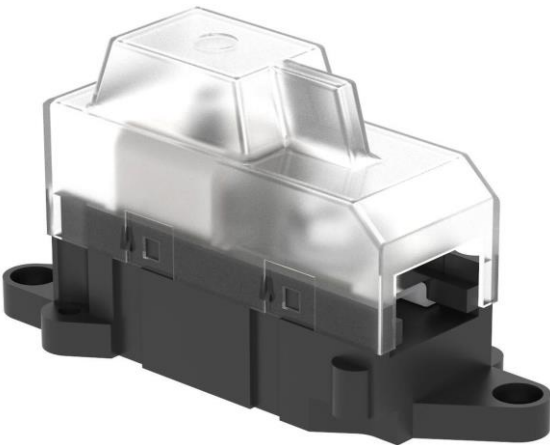

Description

OLE-connectors are housing equipped OL-connectors. They are designed to be used connecting aluminium and copper conductors. Frames are made of stainless steel and busbars are tin plated copper. OLE-connectors can be mounted side by side with screws to each other.

Drawing

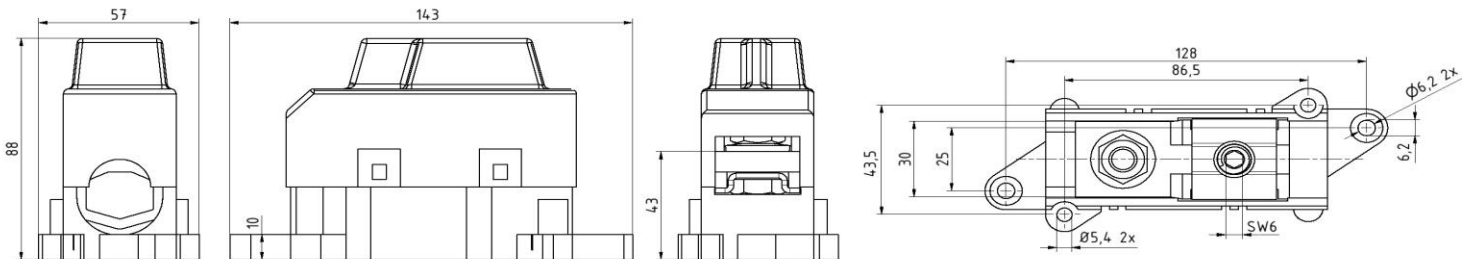

Package			
Package	Box	Pcs / Package	8
		Weight [kg]	3,64
Length [mm]	300	Width [mm]	205
		Height [mm]	100

Ouneva Oy
Teollisuustie 21
FI-82730 Tuupovaara
Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi