

HF 360-2

IP - concealed
EAN 4007841 065973
Article number 065973



high frequency
sensor 360°



max. Ø 12 m



IP20



mounting height
max. 4 m



2 - 2000 lux



temperature



air humidity



energy saving



plastic free
packaging

5 years

manufacturer's
warranty steinel-
professional.de/
garantie

Function description

Smart surveillance professional. The HF 360-2 from the new Control PRO 2 range. Modern look and intelligent 360° HF sensor technology – ideal for stairwells and toilet facilities with cubicles. Conveniently adjusted and interconnected via Bluetooth. Interfaces: COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD (Slave). Mounting height up to 4 m. Reach: 12 m.

Technical specifications

Dimensions (L x W x H)	65 x 103 x 103 mm	Mounting height	2,50 – 4,00 m
With motion detector	Yes	Mounting height max.	4,00 m
Manufacturer's Warranty	5 years	Optimum mounting height	2,8 m
Settings via	Bluetooth, Web-Interface	HF-system	5,8 GHz
With remote control	No	Detection	also through glass, wood and stud walls
Version	IP - concealed	Detection angle	360 °
PU1, EAN	4007841065973	Angle of aperture	140 °
Type	Presence detector	Sneak-by guard	Yes
Application, place	Indoors	Capability of masking out individual segments	No
Application, room	function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors	Electronic scalability	Yes
Colour	white	Mechanical scalability	No
Colour, RAL	9003	Reach, radial	Ø 12 m (113 m²)
Includes corner wall mount	No	Reach, tangential	Ø 12 m (113 m²)
Installation site	ceiling	Transmitter power	< 1 mW
Installation	Concealed wiring, Ceiling	Twilight setting	2 – 2000 lx

HF 360-2

IP - concealed
EAN 4007841 065973
Article number 065973




Technical specifications

IP-rating	IP20
Ambient temperature	-25 – 50 °C
Material	Plastic
Mains power supply	18 – 55 V
Power supply, detail	Passive PoE SELV, standard PoE (IEEE 802.3 af)
Sensor Technology	High frequency

Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Interconnection via	Bluetooth, LAN

Detection Zone

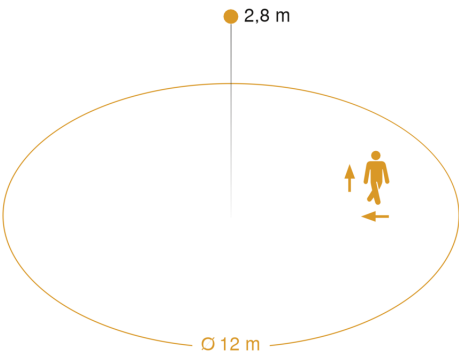

Mögliche Montagehöhe: 2,50 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

