


RC unit for 5SY, 2-pole, type A, In: 63 A, 30 mA, Un AC: 230 V

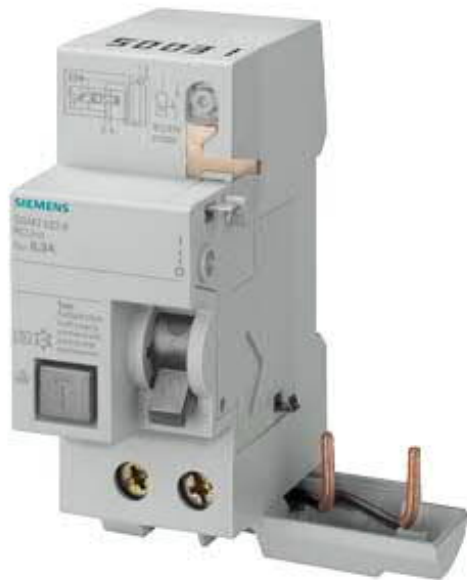

Model	
Product brand name	SETRON
Product designation	RC unit
Design of the product	Instantaneous
Product variations	for 5SY
General technical data	
Number of poles	2
Size of installation devices / acc. to DIN 43880	1
Protection against electrical shock	Finger and back-of-hand safe
circuit-breaker / Design	5SM2
Mechanical service life (switching cycles) / typical	10 000
Switching function / short-term delayed	No
Overvoltage category	III
Insulation voltage / rated value	460 V
Supply voltage	
Operating current / at AC / rated value	63 A
Supply voltage	
• at AC / rated value	230 V

• for testing equipment / minimum	195 V
Operating frequency	50 Hz
Supply voltage frequency	
• rated value	50 Hz

#### Protection class

Protection class IP	IP20, if the distribution board is installed, with connected conductors
---------------------	---

#### Dissipation

Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	4.6 W
---	-------

#### Current

Tripping residual current / rated value	30 mA
Tripping residual / rated value / derated current	
• at 40 Cel	58.59 A
• at 45 Cel	58.59 A
• at 50 Cel	56.7 A
• at 55 Cel	54.81 A
• at 60 Cel	53.55 A
• at 65 Cel	52.29 A
• at 70 Cel	50.4 A
Type of fault current	A
Surge current resistance / rated value	1 kA

#### Product details

Product feature / silicon-free	Yes
Product extension / can be installed / supplementary devices	Yes

#### Connections

Connectable conductor cross-section / solid	
• minimum	1.5 mm <sup>2</sup>
• maximum	25 mm <sup>2</sup>
Connectable conductor cross-section / stranded	
• minimum	1.5 mm <sup>2</sup>
• maximum	25 mm <sup>2</sup>
Tightening torque / with screw-type terminals	
• minimum	2.5 N·m
• maximum	3 N·m
Position / of power supply cord	top or bottom

#### Mechanical Design

Height	90 mm
Width	71 mm

Depth	70 mm
Installation depth	70 mm
Number of width units	2
Mounting type	DIN rail (REG)
Mounting position	any
Net weight	217 g

#### Environmental conditions

Ambient temperature	
• minimum	-25 °C
• maximum	45 °C
Ambient temperature / during storage	
• minimum permissible	-40 °C
• maximum permissible	75 °C

#### Certificates

Reference code	
• acc. to DIN EN 61346-2	F
• acc. to DIN EN 81346-2	F

General Product Approval	Declaration of Conformity	Test Certificates	other
--------------------------	---------------------------	-------------------	-------



CCC



VDE

[Miscellaneous](#)



EG-Konf.

[Miscellaneous](#)

[Miscellaneous](#)

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SM2325-6>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5SM2325-6>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SM2325-6](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM2325-6)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

