

Koteloidut turvakytkimet




Koteloidut turvakytkimet 3-napaiset, IP65 Kotelo polykarbonaattia

Snro	Tyyppi	AC-21A A	AC-23A kW 440V	Apukoskettimet
3617268	RLO16/3PM-D1	16	7,5	
3617269	RLO16/3PM-D1/H11	16	7,5	1su + 1av
3617273	RLO25/3PM-D1/H11	25	9,5	1su + 1av
3604448	RLO32/3PM-D1/H11	32	11,5	1su + 1av
3604449	RLO40/3PM-D1/H11	40	20,0	1su + 1av
3604450	RLO63/3PM-D1/H11	63	22,0	1su + 1av
3604452	RLT80/3PM-D2/H11	80	30,0	1su + 1av
3604454	RLT100/3PM-D3/H11	100	37,0	1su + 1av
3604456	RLT125/3PM-D3/H11	125	45,0	1su + 1av
3604458	RLT180/3K4/H11	180	110,0	1su + 1av
3604460	RLT250/3K4/H11	250	132,0	1su + 1av

Koteloidut turvakytkimet 6-napaiset, IP65 Kotelo polykarbonaattia

Snro	Tyyppi	AC-21A A	AC-23A kW 440V	Apukoskettimet
3617271	RLO16/6PM-D2	16	7,5	
3617272	RLO16/6PM-D2/H11	16	7,5	1su + 1av
3617275	RLO25/6PM-D2/H11	25	9,5	1su + 1av
3604462	RLO32/6PM-D2/H11	32	11,5	1su + 1av
3604463	RLO40/6PM-D2/H11	40	20,0	1su + 1av
3604464	RLO63/6PM-D2/H11	63	22,0	1su + 1av
3604466	RLT80/6PM-D3/H11	80	30,0	1su + 1av
3604468	RLT100/6PM-D3/H11	100	37,0	1su + 1av
3604469	RLT125/6PM-D3/H11	125	45,0	1su + 1av
3604471	RLT180/6K4/H11	180	110,0	1su + 1av
3604473	RLT250/6K4/H11	250	132,0	1su + 1av

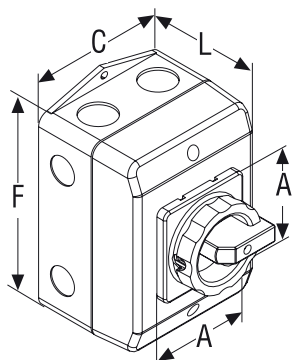

Mitat:

Tyyppi 3- ja 6-napaiset	A	C	F	L	Läpiviennit Lyhyt sivu	Pitkä sivu
PM/D1	66	100	140	81	4 x M25	4 x M20
PM/D2	66	146	176	104	4 x M32/40	4 x M20
PM/D3	90	302	212	137	4 x M50/63	6 x M20
K4	90	373	373	230	2 x M40/63 2 x M32/50	4 x M25/40


EMC suojatut koteloidut turvakytkimet 3-napaiset, IP65
Kotelo polykarbonaattia

Snro	Tyyppi	AC-21A A	AC-23A kW 440V	Apukoskettimet
3617270	RLO16/3PM-D1/H11/EMC	16	7,5	1su + 1av
3617274	RLO25/3PM-D1/H11/EMC	25	9,5	1su + 1av
3604474	RLO32/3PM-D1/H11/EMC	32	11,5	1su + 1av
3604479	RLO40/3PM-D1/H11/EMC	40	20,0	1su + 1av
3604484	RLO63/3PM-D1/H11/EMC	63	22,0	1su + 1av
3604486	RLT80/3PM-D2/H11/EMC	80	30,0	1su + 1av
3604488	RLT100/3PM-D3/H11/EMC	100	37,0	1su + 1av
3604489	RLT125/3PM-D3/H11/EMC	125	45,0	1su + 1av
3604491	RLT180/3K4/H11/EMC	180	90,0	1su + 1av
3604493	RLT250/3K4/H11/EMC	250	132,0	1su + 1av

Mitat:

Tyyppi 3- ja 6-napaiset	A	C	F	L	Läpiviennit Lyhyt sivu,	Pitkä sivu
PM/D1	66	100	140	81	4 x M25	4 x M20
PM/D2	66	146	176	104	4 x M32/40	4 x M20
PM/D3	90	212	302	137	4 x M50/63	6 x M20
K4	90	373	373	230	2 x M40/63, 2 x M32/50	4 x M25/40

