

L..LUA 230V/240V, L..A-TA 230V,240V

Magnetic ballasts for fluorescent T8 lamps




A2


Lamp			Ballast						Compensation	
Lamp type	Lamp wattage	Lamp current	Ballast type	EEI	Voltage	Net weight	Inductive	Temp. rise	Parallel Ck 230/250V ±10%	Mains current
	(W)	(A)				(kg)	λ	ΔT (°C)	(μF)	(A)
T8	2 x 18	0.37	L 2x18 A-TA	A2	230	1.0	0.48	30	4.5	0.23
T8	2 x 18	0.37	L 2x18 A-TA	A2	240	1.0	0.48	30	4.5	0.22
T8	36	0.43	L 36 LUA	A2	230	1.2	0.42	30	4.5	0.23
					240		0.40	30	4.5	0.22
T8	58	0.67	L 58 LUA	A2	230	1.4	0.43	30	7.0	0.34
					240		0.41	30	7.0	0.32
T8	70	0.70	L 75 LUA	A2	240	1.4	0.47	30	6.0	0.41

Dimensions


	L..LUA	L..A-TA
LENGTH 'a' (mm)	114	190
WIDTH 'b' (mm)	54	42
HEIGHT 'c' (mm)	45,5	28
'd' (mm)	105	180

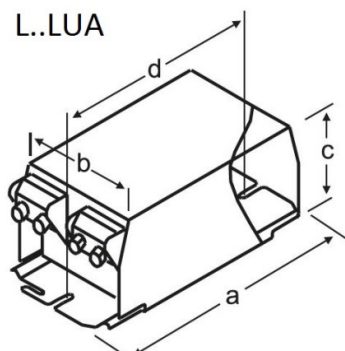

L..A-TA



Connection diagram

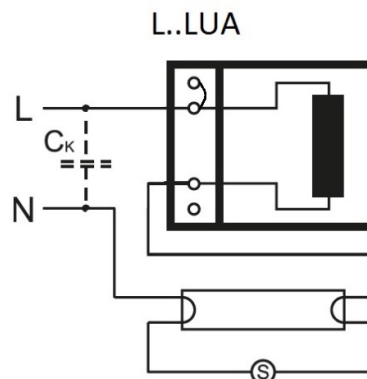

L..A-TA

