

LED indoor light without sensor

RS PRO P3

Neutral white

EAN 4007841 056124

Article number 056124



LED

4000 K



IP54



soft light start



connectable with master



energy saving

5 years

manufacturer's warranty steinel-professional.de/garantie



CE



ENEC 10



VDE

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P3 integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the version with sensor by cable. Output: 17,8 W with 2188 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	400 x 142 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	Neutral white
PU1, EAN	4007841056124
Colour	white
Installation site	wall, ceiling
Installation	Ceiling
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Luminous flux total product	2188 lm

Lamp	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Main light adjustable	No
Interconnection via	Cable
Lebensdauer LED nach IEC-62717 (L70)	100.000 h
Lebensdauer LED nach IEC-62717 (L80)	74.000 h
Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Lebensdauer LED nach IES TM-21 (L80)	>60.000 h
Absicherung B10 (ST)	54
Absicherung B16 (ST)	87
Absicherung C10 (ST)	90
Absicherung C16 (ST)	145
Output	17,8 W
Colour Rendering Index CRI	= 82

<https://www.steinel.de>

Subject to technical modifications

02.2023 Page 1 from 2

LED indoor light without sensor

RS PRO P3


Neutral white
EAN 4007841 056124
Article number 056124




Technical specifications

Total product efficiency	123 lm/W	Photobiological safety in accordance with EN 62471	RG1
Colour temperature	4000 K	Starting current, maximum	13 A


Dimension Drawing

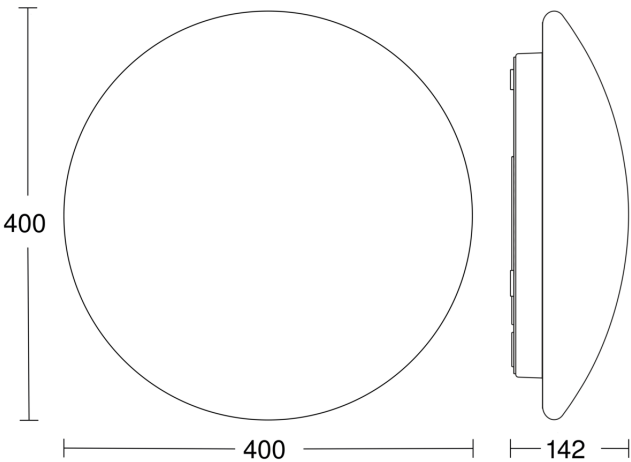

Master circuit diagram



Master/slave interconnection circuit diagram

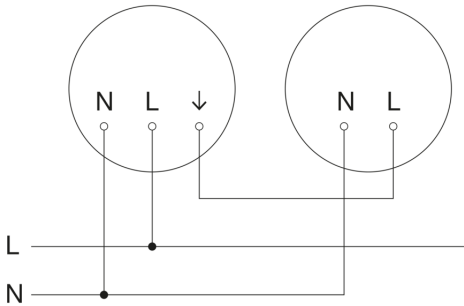

Master/slave interconnection circuit diagram

