

vizulo



Micro Martin

FLOOD

Micro martin floodlight



with fins



smooth





tool-less



tool-less
smooth



Micro martin floodlight with fins



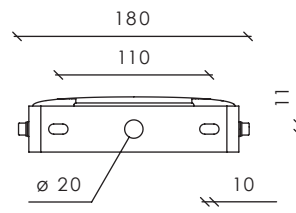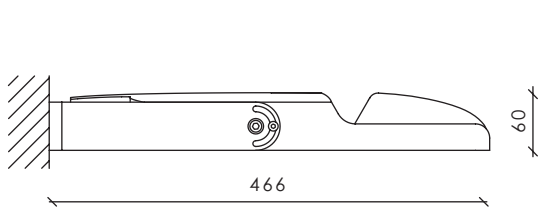

Max.wind load area, SCd, m²: 0,029

Other colors available on request

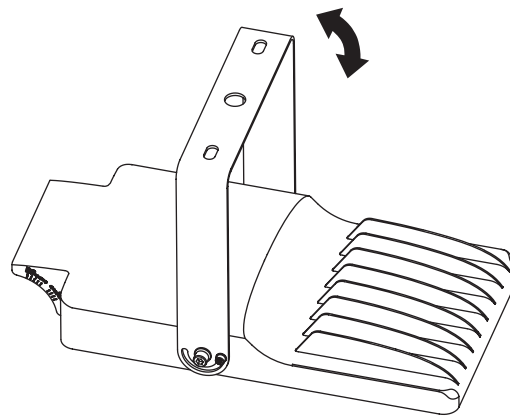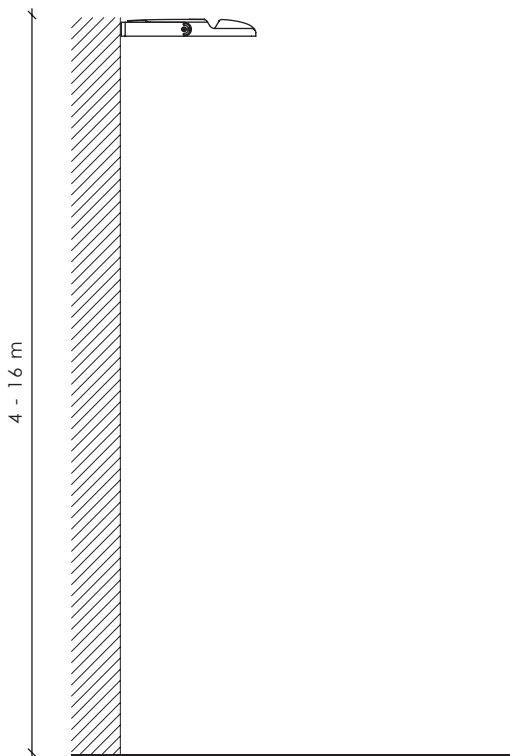

Technical information




V	220 - 240	1-10V; DALI; Midnight dimming
Hz	50 - 60	Chromaticity tolerance (initial MacAdam): 5
W	5 - 75 5 - 50 ⁽¹⁾	Warranty 5 years 100 000 h (L95B10C10) at Ta = 25 °C
lm	470 - 8875 470 - 6447 ⁽¹⁾	
lm/W	90 - 132	<i>Surge protection:</i> 6kV / separate built-in 10 kV
K	3000 / 4000	<i>Body:</i> Die-cast aluminum
°C	-40 to +50	
CRI	>70 / >80 ⁽²⁾	

⁽¹⁾ Smooth

⁽²⁾ Luminaires with color rendering (CRI): Ra >90 on request



* Preliminary and will change according to testing results. Data may not be used for tenders or purchasing
Technical parameters for final product can differ from typical data by 7% due to special conditions of LED manufacturing processes

Model name principles

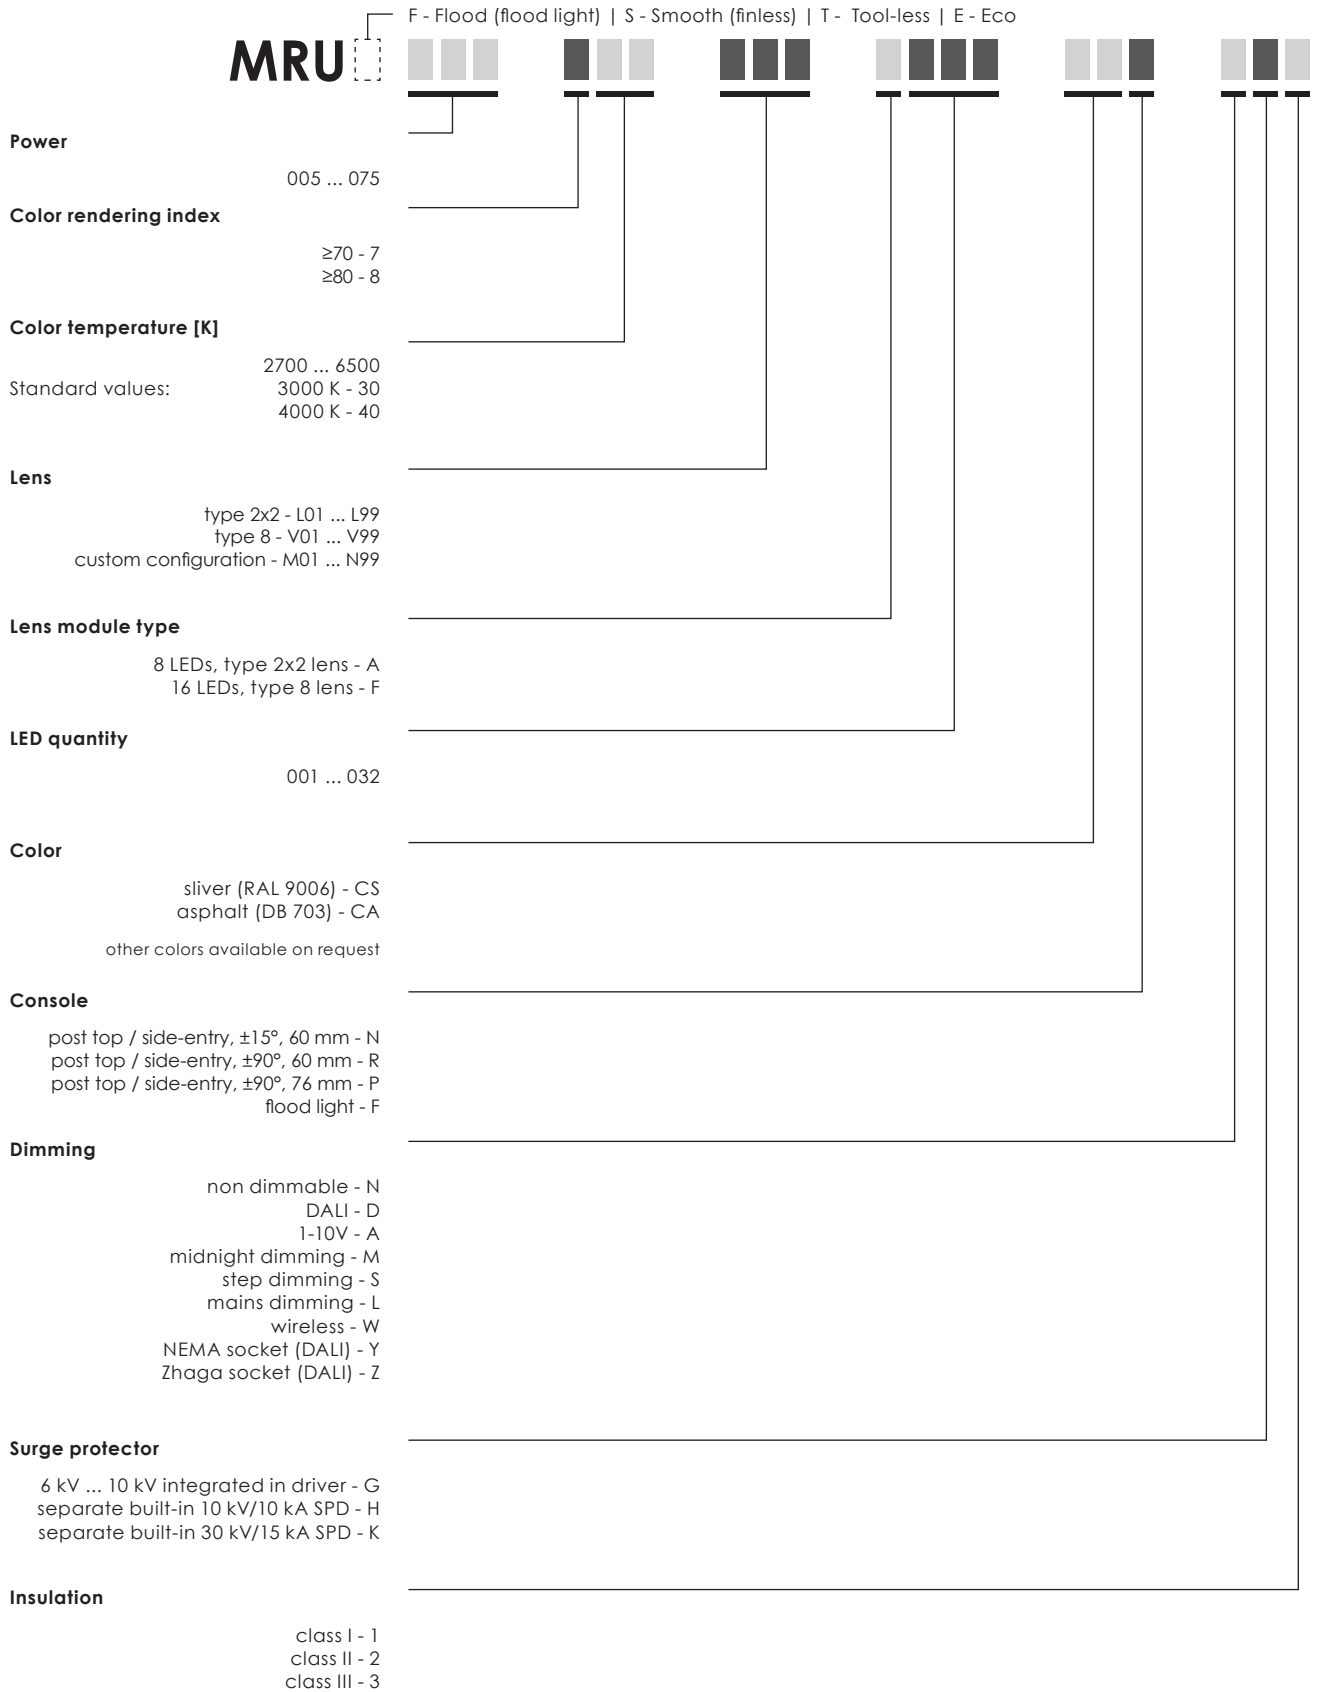



Micro martin floodlight tool-less



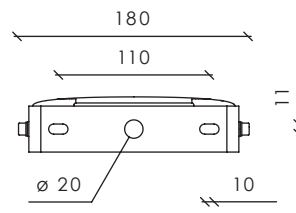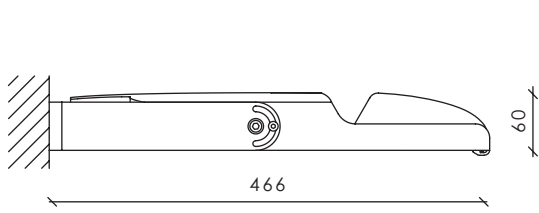



Max.wind load area, SCd, m²: 0,029

Other colors available on request

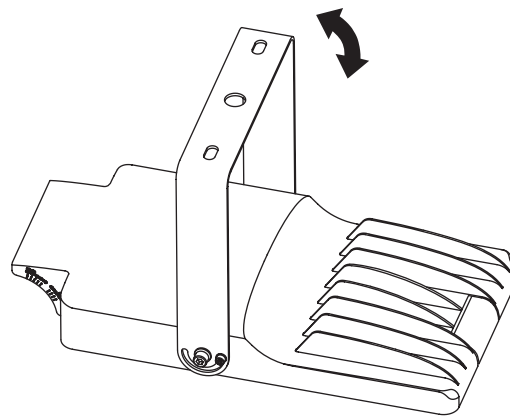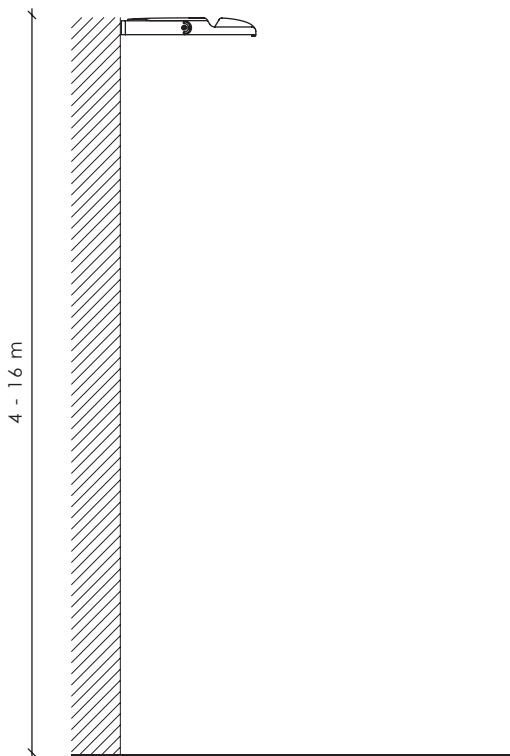



Micro martin floodlight smooth



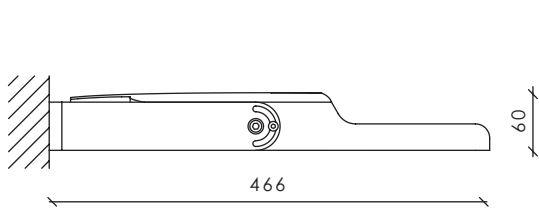




Max.wind load area, SCd, m²: 0,029

Other colors available on request

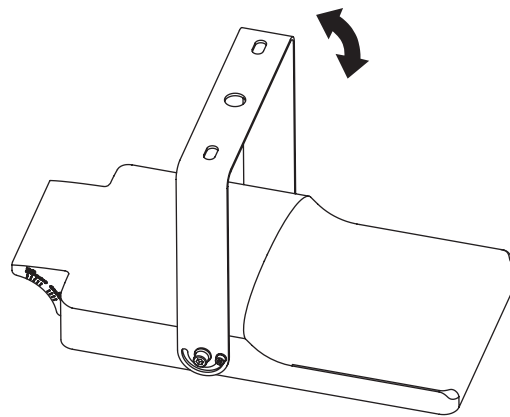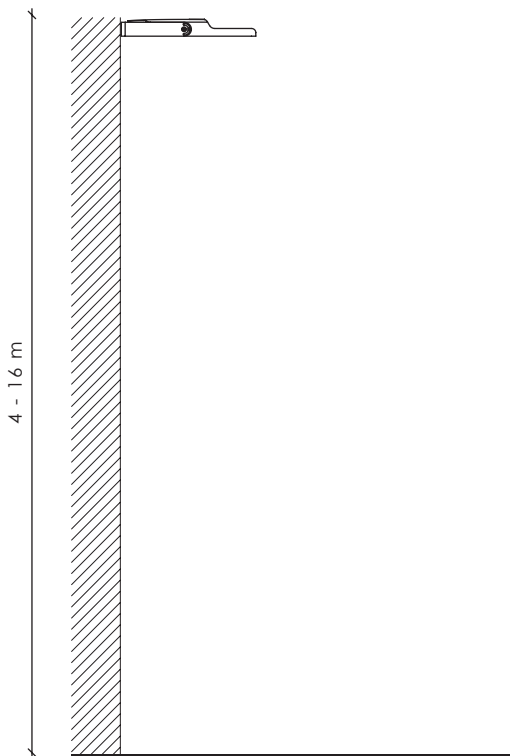



Micro martin floodlight tool-less smooth

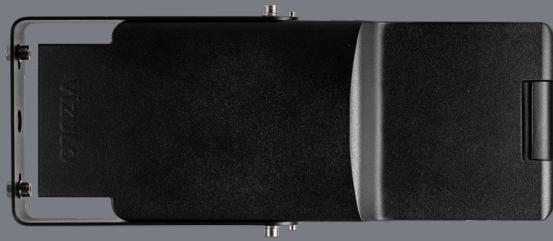

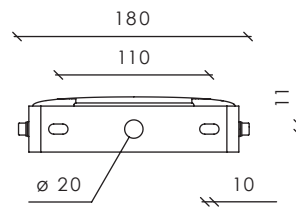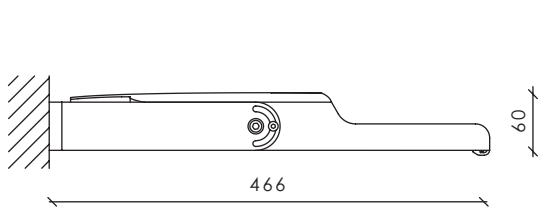

Max.wind load area, SCd, m²: 0,029

Other colors available on request

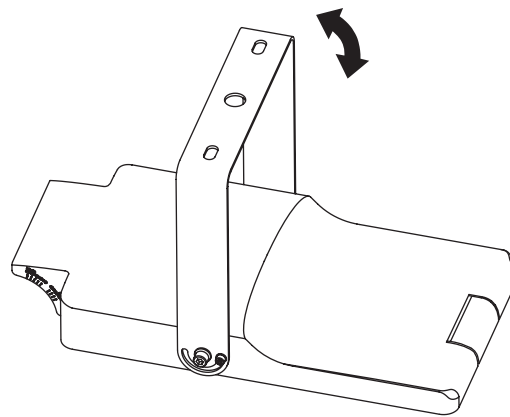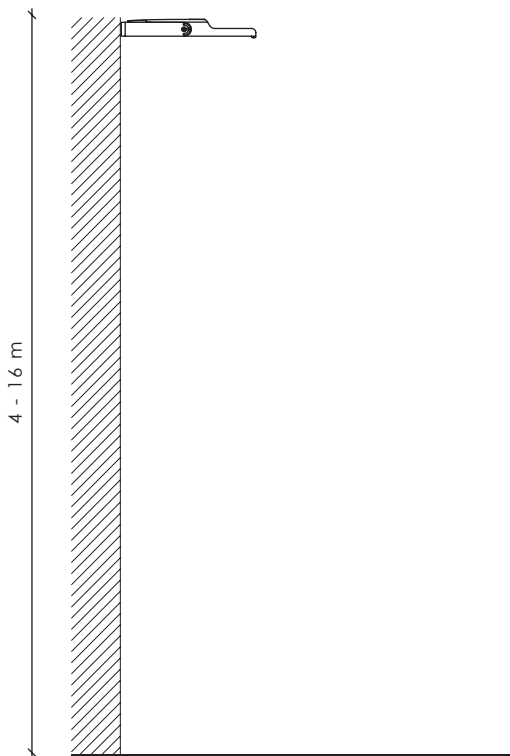


Accessories

Citintelly Segment controller

Segment Controller receives commands from Citintelly server via GSM and transmits tasks to Luminaire Controller via radio frequency communication.

Art. 70010004

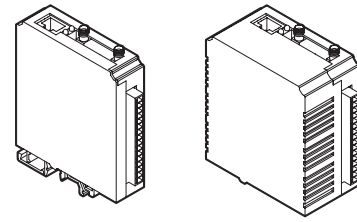


Citintelly Luminaire controller

Luminaire Controller is wireless mesh-networking device that uses 868 MHz for communication with Segment Controller and other Luminaire Controllers. It is delivered in various configurations to meet the needs of your applications.

Art. 70010001 /
LC2M-23-05-R Luminaire
Controller - 2 relays

Art. 70010002 /
LC2M-12-05-R Luminaire
Controller - 1 relay



Citintelly Surge Protection device

Surge Protection device offers protection against lighting surges;

Voltage Protection level up (L-N) $\leq 1,5$ kV


Voltage Protection level up (L/N-PE) $\leq 2,0$ kV

$U_{oc} = 10$ kV

$I_{max} = 10$ kA

$I_{nom} = 5$ kA

Art. 70020001



Radio Frequency Antenna

Heavy duty IP67 enclosure
Mounted in cabinet or luminaire body
with 14 mm screw
SMA connector

Art. 70000108




NEMA Socket

2213362-3, 5 pin NEMA socket 105°C wires

2213362-4, 7 pin NEMA socket 105°C wires


Art. 70000362

Art. 70000333




Dummy Link for NEMA Socket

Art. 70000113




MSLC205RG Luminaire controller + radar, Zhaga, 80mm

Art. 70010027



**MSLC205RGL Luminaire controller,
Zhaga, 80mm**

Art. 70010029




Zhaga socket no cap

Art. 70000612



Zhaga socket with cap


Art. 70000613



Connector

Art. 70000313


IP66 rated connector offers easy installation of the street luminaires.
3 wire cable connector



Connector

Art. 70000304


IP66 rated connector offers easy installation of the street luminaires.
5 wire cable connector



Pre-installed cable sets

For internal power supply:


- 3 x 1,5 mm - 0,5 m long cable.....Art. 70000319
- 3 x 1,5 mm - 5 m long cable.....Art. 70000320
- 3 x 1,5 mm - 6 m long cable.....Art. 70000321
- 3 x 1,5 mm - 8 m long cable.....Art. 70000322
- 3 x 1,5 mm - 10 m long cable.....Art. 70000323
- 3 x 1,5 mm - 12 m long cable.....Art. 70000324
- 3 x 1,5 mm - 18 m long cable.....Art. 70000325
- 3 x 1,5 mm - 20 m long cable.....Art. 70000425
- 3 x 1,5 mm - 22 m long cable.....Art. 70000426
- 3 x 1,5 mm - 25 m long cable.....Art. 70000427
- 3 x 1,5 mm - 32 m long cable.....Art. 70000430
- 3 x 1,5 mm - 42 m long cable.....Art. 70000431
- 3 x 1,5 mm - 50 m long cable.....Art. 70000432



Pre-installed cable sets

For internal power supply:

- 5 x 1,5 mm - 0,5 m long cable.....Art. 70000305
- 5 x 1,5 mm - 5 m long cable.....Art. 70000316
- 5 x 1,5 mm - 6 m long cable.....Art. 70000317
- 5 x 1,5 mm - 8 m long cable.....Art. 70000318
- 5 x 1,5 mm - 10 m long cable.....Art. 70000306
- 5 x 1,5 mm - 12 m long cable.....Art. 70000307
- 5 x 1,5 mm - 18 m long cable.....Art. 70000308
- 5 x 1,5 mm - 20 m long cable.....Art. 70000428
- 5 x 1,5 mm - 22 m long cable.....Art. 70000429
- 5 x 1,5 mm - 25 m long cable.....Art. 70000429
- 5 x 1,5 mm - 32 m long cable.....Art. 70000433
- 5 x 1,5 mm - 42 m long cable.....Art. 70000434
- 5 x 1,5 mm - 50 m long cable.....Art. 70000435



VIZULO

Bukultu street 11
Riga, LV – 1005, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

office@vizulo.com
www.vizulo.com



VIZULO



VIZULO_PHOTO

