

Sensor-switched outdoor light

L 1 S

white

EAN 4007841 650513

Article number 650513



Max. 60 W



infrared sensor
180°



max. 10 m



IP44



Sensor 90° vertical



2 - 2000 lux



8 sec - 35 min



shock proof IK07



ideal 2 m



energy saving

Function description

Practical design. Practical sensor-switched outdoor light L 1 S, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, includes sheet of house numbers.

Technical specifications

Dimensions (L x W x H)	120 x 110 x 255 mm
With lamp	No
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Version	white
PU1, EAN	4007841650513
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, courtyard & driveway
includes sheet of self-adhesive numbers	Yes
Installation site	wall
Impact resistance	IK07
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic

Power consumption	0,55 W
Mounting height max.	3,00 m
Slave modeselectable	No
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (14 m ²)
Reach, tangential	r = 10 m (157 m ²)
Photo-cell controller	Yes
Cover material	sticker
Lamp	All-purpose lamp
Base	E27
Soft light start	No
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Basic light level function	No

Sensor-switched outdoor light

L 1 S

white

EAN 4007841 650513

Article number 650513




Technical specifications

Cover material	Plastic, opal
Mains power supply	230 – 240 V / 50 Hz
Output	60 W

Interconnection	No
Optimum mounting height	2 m

Detection Zone

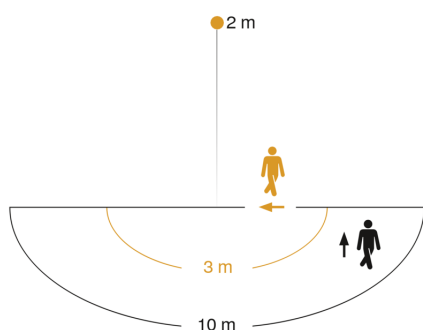


Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

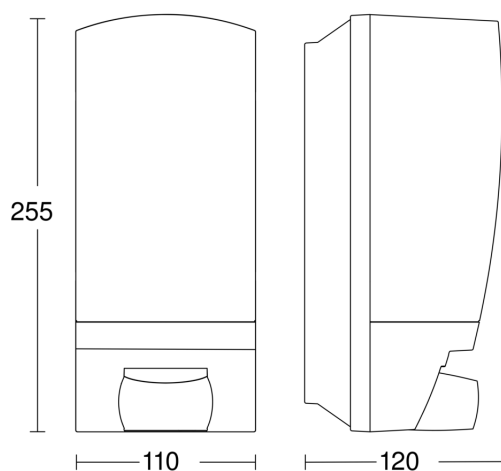

Circuit diagram

