


TUNGSRAM™

Innovation is our heritage
EST. 1896

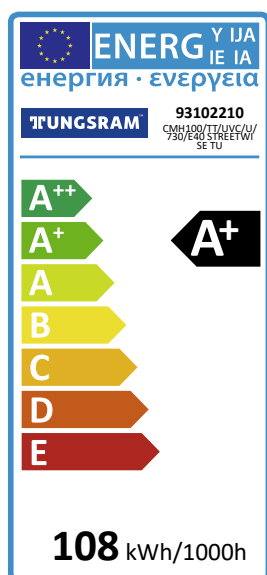

108

kWh/1000h

A+

energy class

101

lumens/watt

ConstantColor™ CMH Tubular Clear StreetWise

CMH100/TT/UVC/U/730/E40

STREETWISE TU

93102210

Product information

Until now, public authorities and other organisations have had to choose between high cost, high quality outdoor illumination or low cost alternatives which, even at peak efficiency, make streets and other areas look dingy or dull.

GE's new generation of CMH StreetWise™ lamps especially designed for outdoor lighting offers the best of both worlds. Bright, white, 'natural' light and low costs for both running and maintenance. With CMH lighting, streets and other public spaces can feel safer for pedestrians. More than that, their "daylight" colour rendering improves the ability of drivers to recognise shapes and colours, especially in peripheral vision. This also promotes quicker driver response times.



Application areas



Road and tunnel



Street and
pedestrian



Commercial
areas

Product data

Product Code	93102210
Light Center Length [mm]	132
Bulb Shape	Tubular
Bulb Finish	Clear
Maximum Overall Length [mm]	211
Net weight per piece [g]	130
Gross weight per piece [g]	171
Operating position	universal
Mercury Content [mg]	13.1
UV radiance	Exempt
Brand	Tungsram
Cap/Base	E40

Performance data

Colour Code	730
Rated Lumens [lm]	10500
Weighted energy consumption [kWh/1000h]	107.8
Rated efficacy [LpW]	107
Energy efficiency class (EEC)	A+
Nominal chromaticity coordinate X	0.439
Nominal chromaticity coordinate Y	0.405
Nominal correlated colour temperature (CCT) [K]	3050
Nominal lumens [lm]	10100
Colour Rendering Index (CRI) [Ra]	70


Electrical data

Rated power [W]	98.0
Lamp Current [A]	1.2
Design Ambient Temperature [°C]	25
Run-up time (sec)	240
Hot restart time (sec)	900
Dimming Capability	Yes
Ballast Required	Yes
Nominal power [W]	100
Nominal lamp voltage [V]	100


Logistic data

DUN Code	15994100017360
EAN Code	5994100017363
Pack Quantity	12
Inner pack type	SLEEVE
Outer pack type	OUTER BOX
Layer quantity	288 EUR, 372 UK
Layer quantity EUR	288
Layer quantity UK	372
Pallet quantity EUR (PC)	864
Pallet quantity UK (PC)	1116
Outer case size	215 x 162 x 284 (mm)
Product status	Available


Light distribution

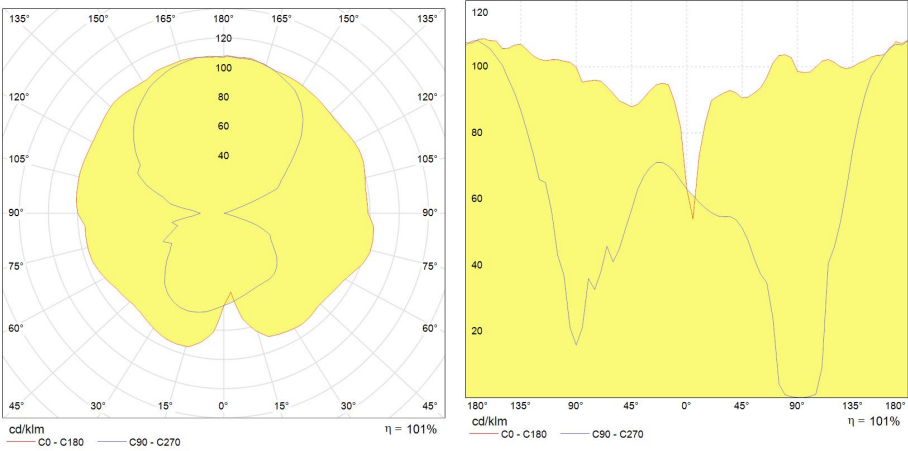

Lumen maintenance data

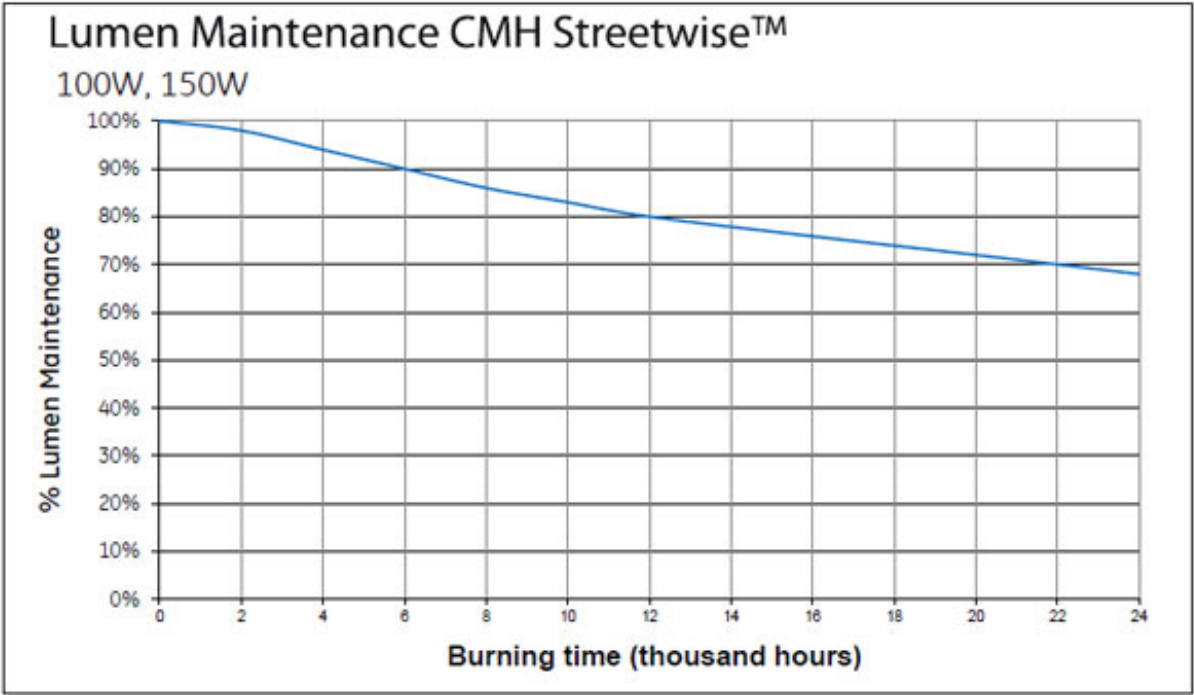

Survival data

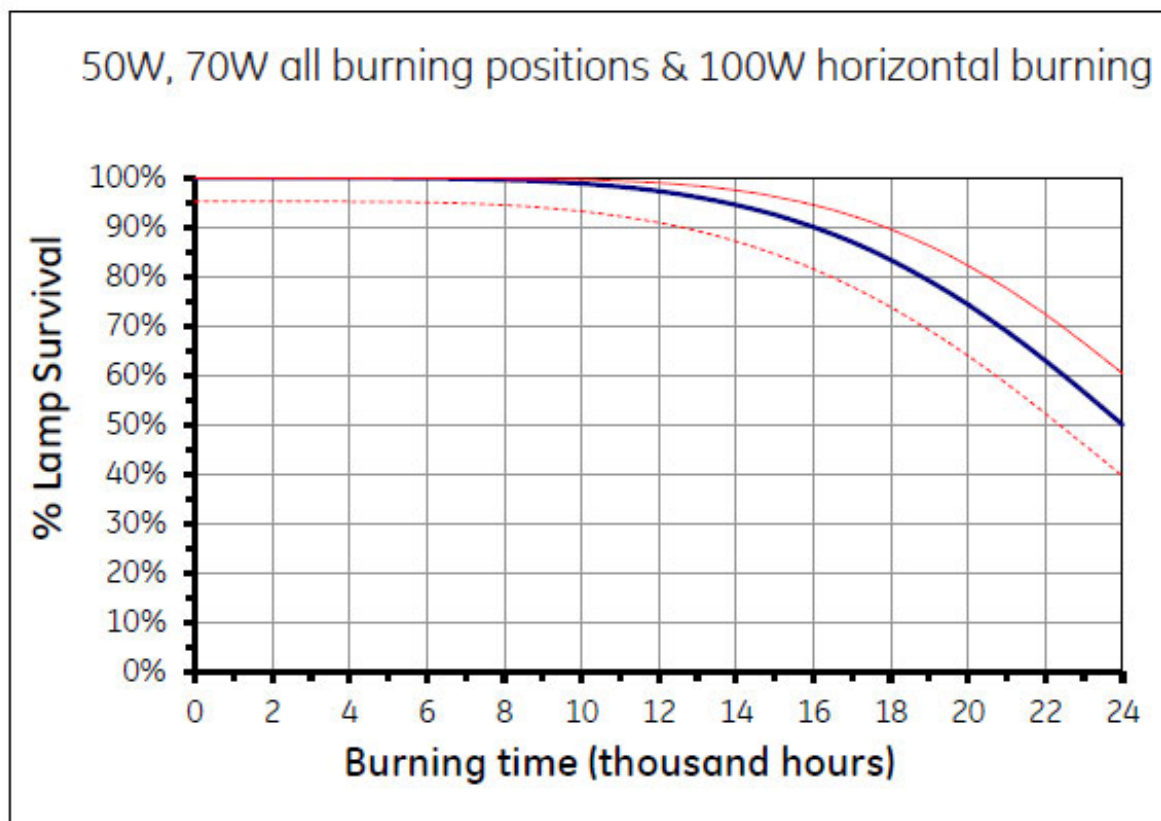

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Photometry \(IES\)](#)

[Product datasheet \(PDF\)](#)

[High-res images / Technical drawings \(HTTP\)](#)