TUNGSRAM[™]

Innovation is our heritage EST. 1896





ConstantColor™ CMH Supermini CMH35/T/UVC/U/930/GU6.5 PRECISE™TU 93095260

Product information

GE's low watt **CMH lamps** have opened new possibilities for lighting design, combining the power and light quality of far larger and less efficient lamps. It is now possible to achieve lighting design that could not be achieved previously with inferior technologies. GE's new **ConstantColor™ CMH Precise™** technology platform has been developed with specific focus to retail applications. GE Precise™ technology offers superb overall light quality, outstanding lumen maintenance, improved efficacy, whihle maintaining long life and reliability. These qualities are why GE is the leader in ceramic metal halide technology.

Application areas



🔛 Industrial

Product data

Product Code	93095260
Light Center Length [mm]	30
Bulb Shape	Tubular
Bulb Finish	Clear
Bulb Diameter [mm]	12
Maximum Overall Length [mm]	52
Net weight per piece [g]	10
Gross weight per piece [g]	12
Operating position	U - Universal
Mercury Content [mg]	4.7
UV radiance	Exempt
Brand	Tungsram
Cap/Base	GU6.5

Performance data

Colour Code	930
Rated Lumens [lm]	4061
Weighted energy consumption [kWh/1000h]	42.9
Nominal efficacy [LpW]	114
Rated efficacy [LpW]	104
Energy efficiency class (EEC)	A+
Rated average life [h]	18000
Nominal chromaticity coordinate X	0.431
Nominal chromaticity coordinate Y	0.394
Nominal correlated colour temperature (CCT) [K]]	3000
Nominal lumens [lm]	4000
Colour Rendering Index (CRI) [Ra]	88


Electrical data

Rated power [W]	39.0
Lamp Current [A]	0.4
Design Ambient Temperature [°C]	25
Run-up time (sec)	< 2
Hot restart time (sec)	> 5
Dimming Capability	No
Ballast Required	Yes
Nominal power [W]	35
Nominal lamp voltage [V]	93


Logistic data

DUN Code	15994100015885
EAN Code	5994100015888
Pack Quantity	12
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	1248 EUR, 1704 UK
Layer quantity EUR	1248
Layer quantity UK	1704
Pallet quantity EUR (PC)	17472
Pallet quantity UK (PC)	22152
Outer case size	105 x 80 x 80 (mm)
Product status	Available

Light distribution

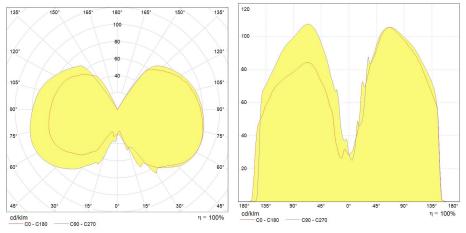


Technical drawing

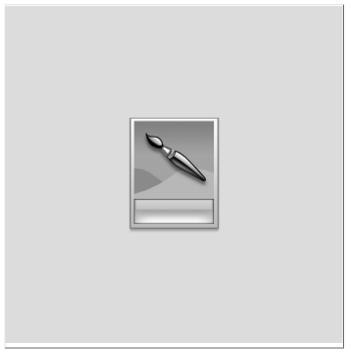


TUNGSRAM

Lumen maintenance data

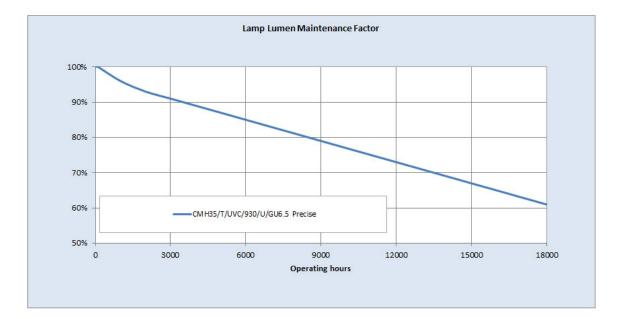

Survival data

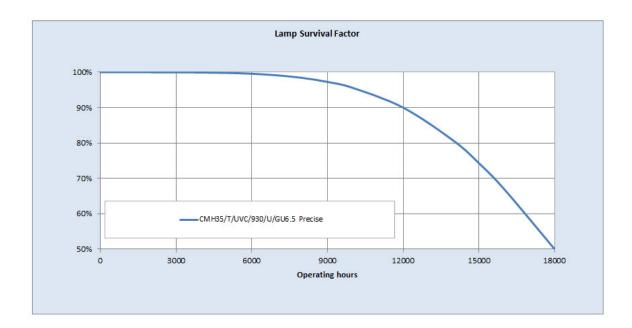

Downloads & Links

Go to the catalog site (HTTP) Photometry (IES) Product datasheet (PDF) High-res images / Technical drawings (HTTP)



Tungsram is a registered trademark of Tungsram Operations Kft.

tungsram.com

We in Tungsram Operations Kft. are constantly developing and improving our products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, Tungsram cannot accept any liability arising from the reliance on such data to the extent permitted by law.