


Nestor Optimus Blowing Bead

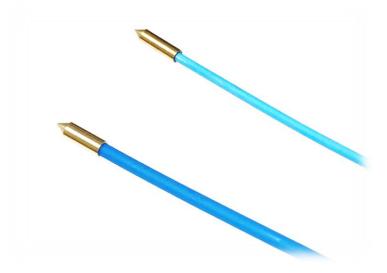

Features

- Brass end caps for air blown fiber such as NBFU (Nestor Blown Fibre Unit).
- Slim design improves blowing performance and reduces risk of stops during blowing.
- Easy to install with pliers.
- Two different sizes.

Application

- Nestor Optimus Blowing Beads can be installed on the tip of the air blown fiber unit to ensure better blowing performance and longer installation distances.
- The product is recommended for long microduct routes with many connectors or bends.

Installation

- Insert Nestor Optimus Blowing Bead onto the air blown fiber unit and attach it onto it's place by pressing it gently with pliers. Do not use too much force and make sure that the blowing bead does not flatten too much.
- Always check that the blowing bead size is in accordance with the cable outer diameter. The bead should fit to fiber unit firmly.

Product information

Code	Description	Cable diameter	Package size
LV2750	Optimus Blowing Bead 1,2 mm	Up to 1,20 mm	100 pcs/bag
LV2751	Optimus Blowing Bead 1,6 mm	Up to 1,65 mm	100 pcs/bag

© Nestor Cables Ltd. 2021.

26.8.2021

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the prior written consent of Nestor Cables Ltd. The information is believed to be correct at the time of issue. Nestor Cables Ltd. reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorized by Nestor Cables Ltd.