



EN 54-3 EN 54-23





VISUAL/AUDIBLE ALARM INDICATORS, WALL MOUNT




Visual/audible-alarm indicators with voice functions, operate at 18 to 30 Vdc, IP65 protection rated.

It is possible to select the alarm tone choosing between 14 tones available, to adjust the volume and the flasher intensity (only for models with visual alarm indicators).

For models with the voice alarm function, besides the 14 tones, it is also possible to choose from the 16 voice messages available in 8 different languages. The EDRV2000 also provides the customization of tones and voice messages.

Available in red or white casing.






Main features	IS2010	IS2011	IS2020	IS2021	IS2030	IS2050
Operating voltage	18 - 30V 	20 - 30V 	18 - 30V 	20 - 30V 	18 - 30V 	18 - 30V
Stand-by current draw	200μΑ	0μΑ	200μΑ	ΟμΑ	200μΑ	200μΑ
Maximum current draw	25mA		40mA		25mA	40mA
Installation method	Wall mount					
Maximum installation height	-	-	3.5 m	3.5 m	-	3.5 m
Light coverage according to EN54-23	-	-	W-3.5-10.2 O-3.5-10.5-10.0	W-3.5-7 O-3.5-8-7	-	W-3.5-10.2 O-3.5-10.5-10.0
Flash frequency	-	-	0.5Hz	0.5Hz	-	0.5Hz
Flash color	-	-	White	White	-	White
Number of selectable tones	14	14	14	14	104	104
Sound pressure at 1 mt.	101dB					
IP Protection grade	IP65 (IP21 EN54-3 certified)					
Operating temperature	from -10 to 55°C					
Syncronization	Yes					
Multicolor indicating LED	Yes					
Dimensions	121 x 121 x 57 mm					
Weight	150 g					






FLASH COVERAGE VOLUME

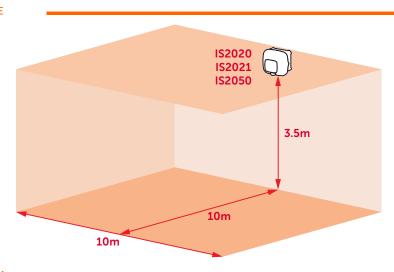

CONFIGURATION DIAGRAM

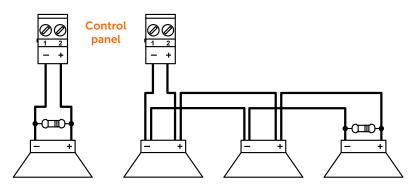

ORDER CODES

IS2010RE	Audible alarm indicator in red casing, wall mount
IS2010WE	Audible alarm indicator in white casing, wall mount

IS2011RE Audible alarm indicator in red casing, wall mount, low power consumption
Audible alarm indicator in white casing, wall mount, low power consumption

IS2020RE Visual/Audible alarm indicator in red casing, wall mount
IS2020WE Visual/Audible alarm indicator in white casing, wall mount

IS2021RE Visual/Audible alarm indicator in red casing, wall mount, low power consumption Visual/Audible alarm indicator in white casing, wall mount, low power consumption

IS2030REAudible alarm indicator with voice alert in red casing, wall mountIS2030WEAudible alarm indicator with voice alert in white casing, wall mountIS2050REVisual/Audible alarm indicator with voice alert in red casing, wall mountIS2050WEVisual/Audible alarm indicator with voice alert in white casing, wall mount



Centobuchi, via Dei Lavoratori 10 63076, Monteprandone (AP), ITALY Tel. +39 0735 705007 _ Fax +39 0735 704912