

Keyword:
 Lithium Xtra

Model: SL-760

Performance Data Size AA
 (Typical values for batteries stored at 25°C for one year)


System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	2.2 Ah
Nominal current	2 mA
Max. continuous discharge current	60 mA
Pulse current capability	140 mA
Anode surface area	14 cm ²
Lithium content	0.65 g
Weight	18 g
Volume	8 cm ³
Temperature range	-55...+85°C

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100°C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


Typical Discharge Curves at +25°C

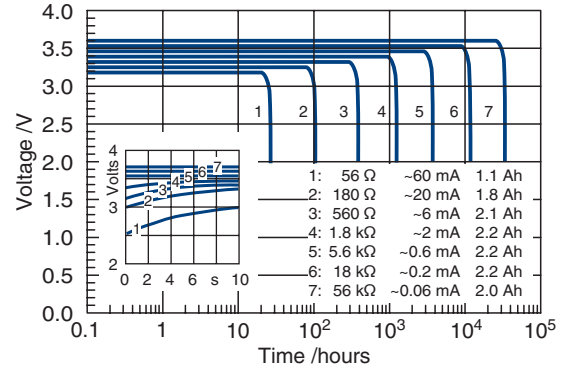



Available Capacity

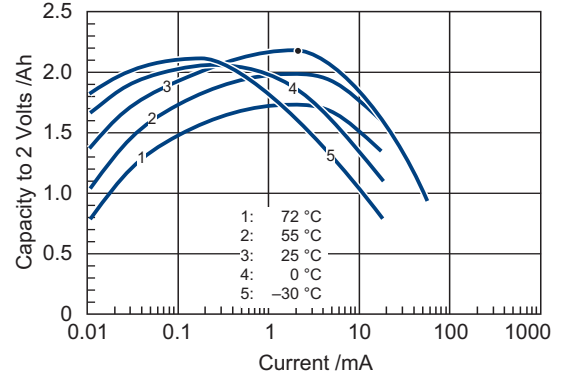

Operating Voltage

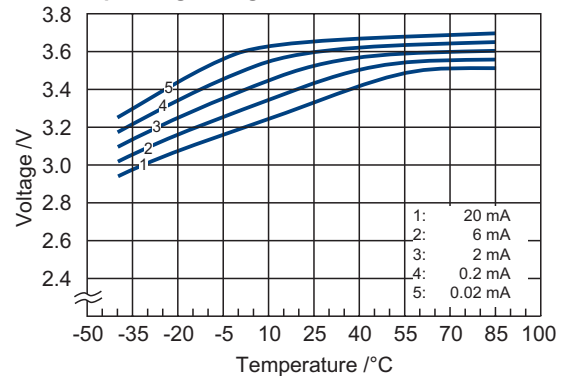

Pulse Discharge Characteristics at +25°C

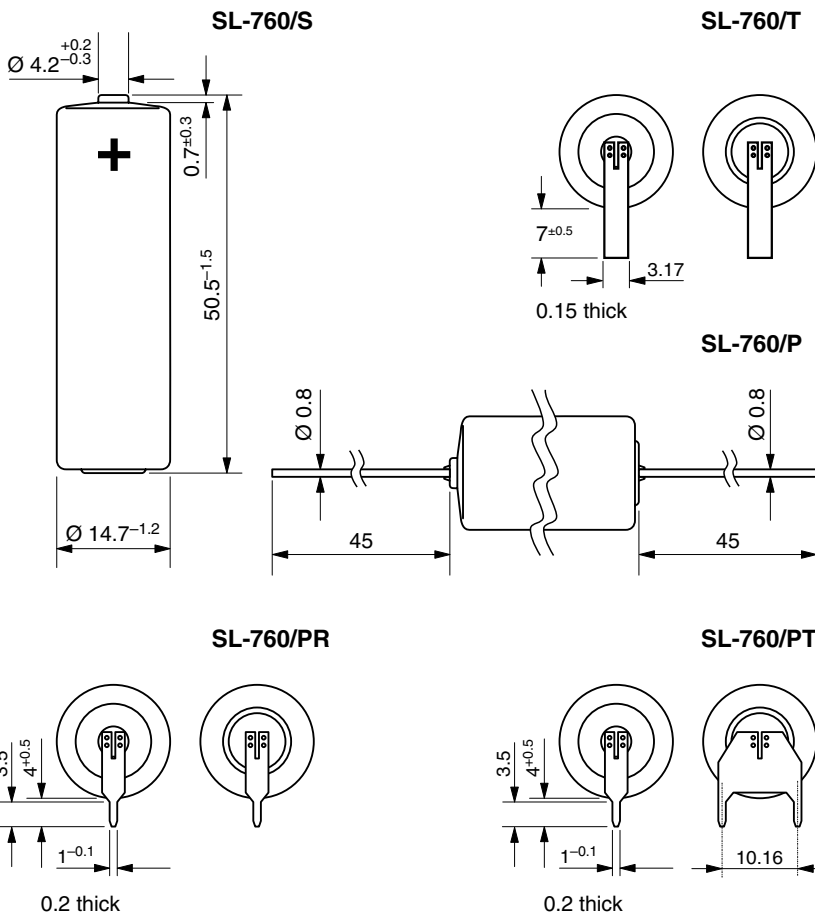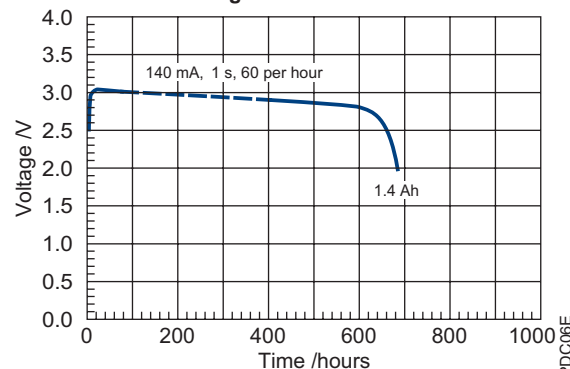

Available Terminations

SL-760/S	Standard
SL-760/T	Tags
SL-760/P	Pins
SL-760/PR	Pins Radial
SL-760/PT	Polarized Tags

Catalogue No.

11 1 07601 00
11 1 07602 00
11 1 07603 00
11 1 07606 00
11 1 07608 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.