

Excel Solid Cat6 Cable U/UTP 23AWG LSOH CPR
B2ca 305 m Box Violet

Item Code: 190-071



- X Cat6 23AWG copper cable
- X U/UTP no overall screening
- X No conductor screening
- X Outer sheath colour: violet
- X Reaction-to-fire class according to EN 13501-6: B2ca
- X Smoke development class according to EN 13501-6: s1a
- X CIBSE TM65 Embodied Carbon: 88.827 kg CO2e

Product Overview

Excel solid Cat6 ethernet cable U/UTP 23AWG LSOH CPR B2ca manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/ IEC 11801 Cat 6 specifications, 305 m or 500 m. Each cable consists of 8 colour coded solid copper conductors twisted together to form four pairs.

These are then formed around a central X-shaped polyethylene centre with the whole cable produced in a LSOH sheath.

Product Specifications

Feature	Values
Conductor surface	Bare
Diameter of conductor	0.55 +/-0.01
AWG size	23
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Core insulation	Solid HDPE


Excel Solid Cat6 Cable U/UTP 23AWG LSOH CPR
B2ca 305 m Box Violet

Item Code: 190-071



Specification core insulation	Polyethylene (PE)
Core identification	Colour
Overall screening	None
Conductor screening	None
Outer sheath material	Copolymer, thermoplastic (LSOH)
Outer sheath colour	Violet
Flame retardant according to IEC 60332-1-2	yes
Reaction-to-fire class according to EN 13501-6	B2ca
Smoke development class according to EN 13501-6	s1a
Euro class flaming droplets/particles according to EN 13501-6	d0
Euro class acidity according to EN 13501-6	a1
Outer diameter approx.	6.2 mm
Installation Temperature Range	-10...60 °C
Operating Temperature Range	-10...60 °C
Category	6
NVP value	65 %

Cross-section diagram

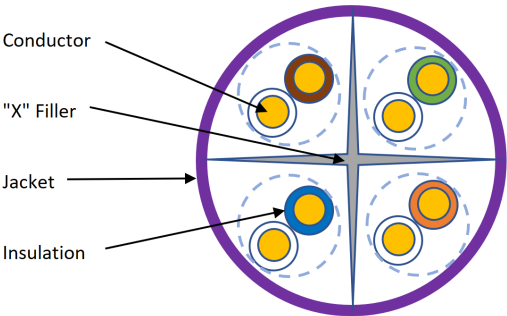

Excel Solid Cat6 Cable U/UTP 23AWG LSOH CPR B2ca 305 m Box Violet

Item Code: 190-071



Cable specifications

Features	Values
Pair-to-Ground Capacitance Unbalance	$\leq 330\text{pF}/100\text{m}$
Mutual Capacitance	$\leq 5.6\text{nF}/100\text{m}$
Max.Delay Skew(ns/100m)	$\leq 45\text{ns}/100\text{m}$
Max.Conductor DC Resistance @ 20 Deg.C	95 (Ohm/km)
Min.Insulation Resistance(Mohm.km)	5000
Dielectric strength	DC ,1KV/min
MBR during installation	8x cable OD
MBR installed	4x cable OD

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH

Excel Solid Cat6 Cable U/UTP 23AWG LSOH CPR
B2ca 305 m Box Violet

Item Code: 190-071



	measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
IEEE 802.3bt (Type 4)	Compliant to IEEE 802.3bt (Type 4)
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Part Number Table

Part Number	Description
190-071	Excel Solid Cat6 Cable U/UTP 23AWG LSOH CPR B2ca 305 m Box Violet

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.